



Product & Service

Reference Guide

We're more
than just
a paint
company



©2016 Behr Process Corporation
3400 W. Segerstrom Ave
Santa Ana, CA 92704

Find us on:
behr.com



CP-BEHRPRO-PRODUCT & SERVICE
Item No. 50004223 11/16





Table of Contents

Product & Service Reference Guide

You'll find everything you need within these pages to help you choose a product, as well as learn how our professional product and service programs can help your business save time and money and, ultimately, be more successful.

Our mission is your success.

Our Brands	3	Wall & Trim Paints	29
Behr Pro Product & Service Program	4	Wood Stains & Finishes	35
Our Distribution Network	7	Concrete Floor Paints & Finishes	37
Our National Programs	8	Clear Finishes	39
Interior Products		Waterproofers	41
Multi-Purpose Primers	10	Roof Paint	41
Special-Function Primers	12	Product Specifications	42
Wall & Trim Paints	15	Master Architectural Paint Specification	44
Ceiling & Floor Paints	21	Index	
Decorative Paints	25	Alphabetical Product List	62
Exterior Products		Numerical Product List	63
Multi-Purpose Primers	26		
Special-Function Primers	27		
Wood Cleaners & Removers	28		

Our Brands

Our 131 years of combined commitment to do right by the customer gives shape to solution-oriented professional services.

BEHR®

In 1947, Otho Behr, Jr. began selling linseed oil to paint stores from the back of his station wagon. As customers began requesting a better redwood treatment, Otho Jr. turned to his father, an accomplished chemist. The result of their efforts was the creation of the first BEHR Stains and the birth of a new business.



Over the years, Behr has continued to grow and innovate, applying new technology to create stains, paints, primers and more. Today, Behr remains steadfast in its mission to do right by the customer. From sourcing the best raw materials to finding the best ways to deliver what you need when you need it, Behr's commitment to quality runs deep in every department.

KILZ®

Melvin Caldwell, the founder of what would one day become Masterchem Industries LLC, started business in 1954 as a Mautz Paint dealer.

In 1974, he introduced the KILZ Brand at the National Paint Show, and renamed his company 'Masterchem' to nationally promote his flagship product, KILZ Primer. Soon afterward, other specialty primers were added to the product line.

The KILZ Brand's success with primers has led to exciting growth opportunities in paint and specialty products such as wood and concrete coatings.

Masco Corporation acquired Masterchem in 2000, and continues the tradition set forth by Mr. Caldwell of developing professional-grade products that solve problems.

Our unwavering commitment to quality, safety, integrity and customer service has made KILZ a trusted brand for more than four decades.

We're more
than just
a paint
company

Behr Pro Product & Service Program

In 2008, we launched our multi-faceted Behr Pro Product & Service Program, dedicated to serving the needs of professional painters, contractors, remodelers and property managers. And in the past year, we have introduced national programs for architects, owners/managers, and residential painters—each designed to meet the specific needs of these industries.



Behr is proud to offer premium products and professional services and support, helping you to meet challenging project demands.



SUPPORT & SOLUTIONS

As part of one of the largest professional service teams in the nation, your Rep is dedicated to helping you every step of the way. They will partner with you to help you acquire and maintain clients, build winning bids, and create competitive pricing models—and can provide a range of color services that can help give your business a competitive edge.

Also, we updated our web site this past year—which already featured a 'Professionals' tab—by adding tabs for 'Architects' and 'Owners/Managers,' each featuring industry-specific information about our product and service offerings. Here, you have access to innovative tools and technical downloads. It's a 24/7 resource to help you grow your business, increase job-site productivity, and learn about industry trends, new products and evolving services. Our professional tools also give you access to a paint calculator and color trends from any job site at any hour via smartphone or tablet.

PRODUCTS THAT PERFORM

Since 1947, Behr has delivered innovative products that professionals have depended on for their quality, value and performance. Recognized for durability, premium performance, rich color, and problem-solving properties, our products have earned many accolades and awards through the years. Our BEHR® and KILZ® Product

families offer a wide breadth of superior products that deliver professional quality and value. Their enhanced durability and premium performance can save you time and help you work more efficiently.

We also partner with protective coating manufacturers to offer our customers more than 200 industrial and high-performance products for commercial projects.

Quality & value: solutions for every surface

Interior Paints & Primers A full breadth of cutting-edge-technology products designed to meet the most stringent performance demands

Exterior Paints & Primers Durable products designed to retain appearance and performance even in the harshest of conditions

Wood Stains, Finishes, Strippers & Cleaners

The colors, opacity, and performance your profession demands

Floor Coatings, Sealers & Prep Advanced protection that doesn't compromise appearance

Specialty Paints Long-lasting protection for the toughest substrates




COLOR SERVICES** Professional-grade tools to help you and other stakeholders visualize colors:

- 1 **Digital Color Renderings** Working with a digital image, we can apply multiple color schemes to every surface, offering a complete and graphic representation of how your property will ultimately look.
- 2 **Color Mock-Ups** Working on a select area, we'll apply real paint samples to your building
- 3 **Color Matching** Precision matching of a corporate color, a competitor's chip, or a shade of carpet
- 4 **Drawdown Samples** Our full-size drawdown sheets are ideal for evaluating color on a large scale
- 5 **Project Close-Out Books** A permanent record and reference of your project's drawdowns, color formulas, specifications and warranties
- 6 **Color Boards** Oversized boards showcasing color schemes and palettes with paint chips and optional digital color imaging

Our Distribution Network

We offer professional services and support in virtually every major market at 2,217 Behr and Home Depot locations.

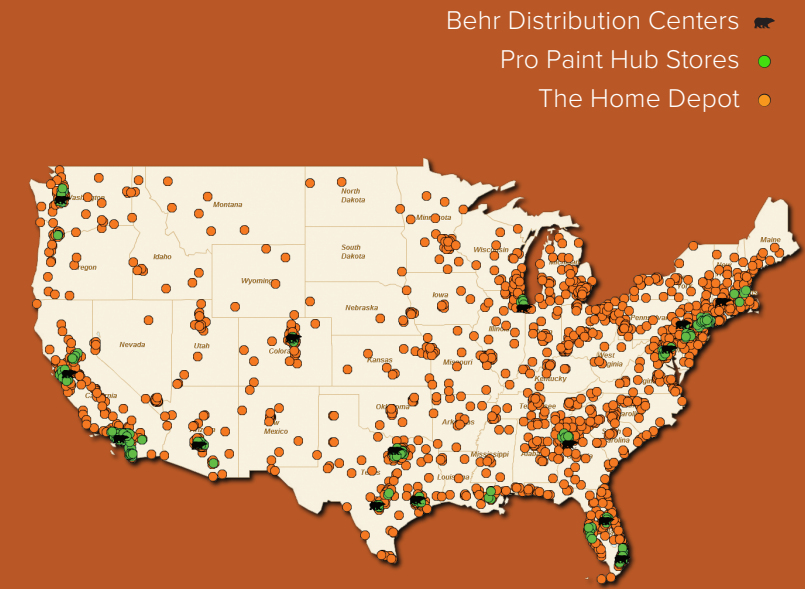

SERVICES YOU DEPEND ON

FREE JOB-SITE DELIVERY* Place your order online or by phone, and we'll deliver it directly to where you need it, upstairs or down—saving you time and money.

FACTORY TINTING Our state-of-the-art factory-tinting services will ensure that every gallon of every order is a perfect match, today or five years from now. And not only are our paints consistent in color, but they're formulated for maximum color retention.

SPECIFICATION SERVICES** We can provide complete product specification information for your commercial projects.

COMPETITIVE PRICING† The Home Depot offers a discount on every BEHR® and KILZ® Product purchase, based on your annual volume. There's no prequalification, no membership fee, no complicated sign-up. For more information or to join The Home Depot Pro Xtra Loyalty Program, ask your Behr Pro Rep or stop by any Home Depot Paint Department.

To learn more about how our professional services can help you grow your business and save time and money, visit behr.com/pro

*Where available; delivery routes start as early as 5 a.m.

**Available to qualified customers. Ask your Behr Pro Rep for details.

†Restrictions apply. Visit the paint department at any Home Depot for details.



BEHR DISTRIBUTION CENTERS

These convenient, nationwide facilities service our professional customers. Knowledgeable paint-store employees offer custom color matching and drawdowns—and professionals have the ability to have large orders tinted quickly with next-day delivery in specific markets. Fully stocked with inventory, customers have the added advantage of one-stop shopping for supplies and sundries, as well as competitive pricing.

THE HOME DEPOT

You'll find our products distributed in every Home Depot—that's nearly 2,000 locations nationwide. Dedicated contractor services desks provide exclusive professional services and support. Services include loyalty programs, a Pro bid room to handle large customer orders with tiered discounts, direct delivery, credit programs, and other specialty sales initiatives. Stop by your local Home Depot's paint department to learn more.

PRO PAINT HUB STORES


Behr and The Home Depot have teamed up to create a 'paint store' within participating Home Depot stores that cater specifically to the professional painter, contractor and property manager. Stop by and ask your dedicated Behr Pro Paint Sales & Service Specialist about the following service offerings:

- Taking your orders by phone
- Scheduling your order for delivery or will call
- Color matching
- Archiving your color information by project
- Offering professional expertise on our products and systems
- Registering you for The Home Depot's Pro Xtra Loyalty Program: money-saving offers, rewards, and exclusive business tools that only come with membership
- Increased inventory levels to support large projects
- Expanded product offerings

DISTRIBUTION IN YOUR AREA

For more information, contact your dedicated Behr Pro Rep by visiting behrpro.com/relocator or calling 877-776-3961.

Our National Programs

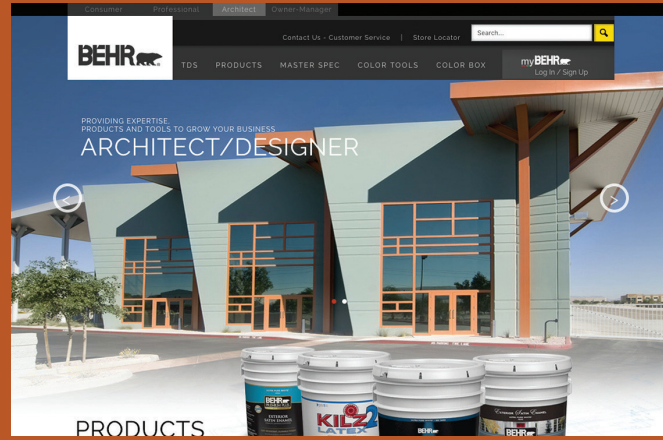

behr.com/architect

Architectural Program

In addition to our professional services, we now offer specialized services to architects, owners/managers, and residential painters.

WE'RE MORE THAN JUST A PAINT COMPANY


Behr understands that environmental certifications are particularly important in your industry, and we offer more than 40 BEHR® and KILZ® Products that have achieved the prestigious GREENGUARD® Gold certification. In addition, many of our products contribute to earning points needed for LEED® credits in both v.3 and v.4, and we offer more than 150 products that measure up to rigorous MPI® standards.

We also offer coatings submittal services to meet specific project requirements as well as product-performance warranties. And we've got tools to help you bring your vision to life for your clients: our innovative and interactive color visualization app, and our new state-of-the-art Architectural Color Box. To receive your complimentary, limited-supply Architectural Color Box, visit behrcolorbox.com



Discover what Behr is doing for Architects today. Contact your Behr Architectural Rep at behr.com/architect

*See usgbc.org/LEED for details.
GREENGUARD is a registered trademark of UL LLC.
MPI is a registered trademark of Master Painters Institute.®

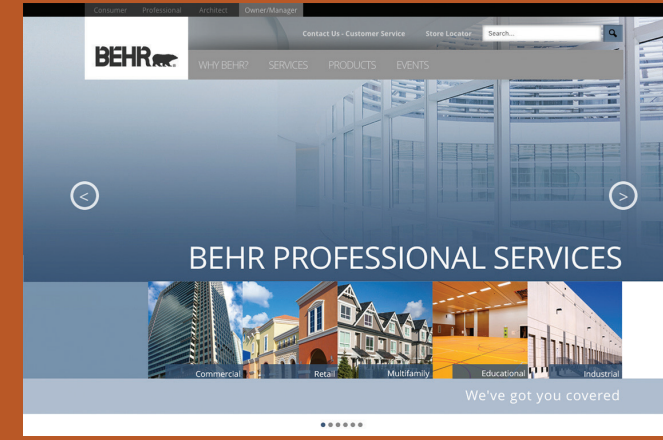

behr.com/owner-manager


Facilities Owners / Managers Program

BEHR® PROFESSIONAL SERVICES: Commercial | Educational | Industrial | Multifamily | Retail

From project planning ... Your dedicated Behr Pro Rep can walk your job with you, observing substrate conditions and photographically noting prep work suggestions. Your Rep can also work with you to establish a schedule that ensures you'll have the product when you need it, and can provide a project specification book that includes that schedule as well as prep and coating requirements, and technical data.

... to archiving ... Behr offers specialized services to help tackle touch-ups, repairs and repaints, which may be inevitable on any property. And at the close of your job, your Rep can provide you with a comprehensive project archive.

Behr brings a complete team of specialists to your project, including a dedicated Behr Pro Rep, to provide answers and create solutions—increasing your team's size without increasing costs. To learn more, contact your dedicated Behr Pro Rep at 877-776-3961 or visit behrpro.com/relocator

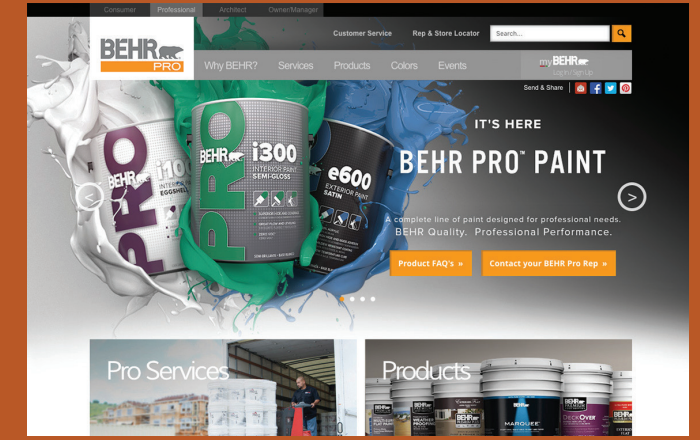

behr.com/pro

Residential Painter Program

TIME- AND MONEY-SAVING SERVICES FOR PRO PAINTERS

Behr and The Home Depot are working together to provide product expertise on BEHR and KILZ Brands, to build Pro services, and better support professional painters.

We have refined our will call and delivery services to help save you time and money. Simply place your order by phone with your dedicated Behr Pro Paint Sales & Service Specialist or local Home Depot store, and they'll schedule it for pick-up or arrange for free job-site delivery.*

Your Specialist can also help you with Behr color services, such as color matching, drawdowns and factory tinting to ensure accurate and consistent colors.

And by registering for The Home Depot's exclusive Pro Xtra Loyalty Program, you will be eligible for money-saving offers, rewards, and exclusive business tools—all at your one-stop shop for paint, sundries and equipment rentals.

To learn more about how Behr can help your business, stop by your local Home Depot or visit behr.com/pro

*Where available; delivery routes start as early as 5 a.m.

Interior Products

BEHR® and KILZ® Brands have a portfolio of interior products that offers dependability and durability with options ranging from value-based commercial products to high-performance, one-coat collections. Our full breadth of cutting-edge technology products are designed to meet the most stringent performance demands.



Interior Multi-Purpose Primers

BEHR PREMIUM PLUS® INTERIOR/EXTERIOR MULTI-SURFACE PRIMER & SEALER



This interior/exterior 100% styrene-acrylic formula resists medium to heavy stains and covers old oil-based paint. This is also a low-odor, low-VOC formula with rust-inhibitive properties, and can be used on 'hot' stucco with pH levels up to 13.

Size & Product #	Substrates	Features	Product Info
Qt. 43604 1 Gal. 43601 5 Gal. 43605	<ul style="list-style-type: none"> Concrete/Tilt-Up Concrete Block/CMU Cement-Board Siding Brick Stucco Plaster Drywall/Gypsum Board 	<ul style="list-style-type: none"> Wood Plywood Ferrous Metals Non-Ferrous Metals Architectural Plastics Vinyl/PVC Fiberglass 	<ul style="list-style-type: none"> 100% Styrene Acrylic Low VOC/Low Odor Mildew-Resistant Finish High-Hide White with a Quick Recoat Time Blocks Medium to Heavy Stains Excellent Adhesion to Multiple Substrates Tintable for Dramatic Color Changes Corrosion and Rust Resistant to Ferrous and Non-Ferrous Metal
			Vehicle: Styrene Acrylic VOC: < 50 g/L Coverage: 250-400 sq. ft./gal. Dry Time: 30 min. touch; 1 hr. recoat

BEHR PREMIUM PLUS® INTERIOR ALL-IN-ONE PRIMER & SEALER



This interior 100% acrylic product helps create a uniform topcoat sheen ideal for multiple surfaces. It blocks medium to heavy stains, and is tintable to allow for dramatic color changes. Low-odor, zero-VOC and GREENGUARD® Gold certified formula.

Size & Product #	Substrates	Features	Product Info
Qt. 7504 1 Gal. 7501 5 Gal. 7505	<ul style="list-style-type: none"> Concrete Concrete Block/CMU Brick Plaster Drywall/Gypsum Board 	<ul style="list-style-type: none"> Wood Wood Paneling Non-Ferrous Metals Architectural Plastics 	<ul style="list-style-type: none"> Sticks to Glossy Surfaces High-Hide White Quick Recoat Time Low Odor, GREENGUARD Gold Certified Zero VOC Tintable Mildew-Resistant Finish
			Vehicle: 100% Acrylic VOC: < 5 g/L Coverage: 250-400 sq. ft./gal. Dry Time: 30 min. touch; 1 hr. recoat

KILZ® PREMIUM INTERIOR/EXTERIOR PRIMER, SEALER & STAIN BLOCKER



This is an interior/exterior superior-quality, high-hide, water-based stain blocker offering GREENGUARD Gold certification and very low odor. It provides excellent adhesion and a mildew-resistant coating.

Size & Product #	Substrates	Features	Product Info
Qt. MC13902 1 Gal. MC13941 5 Gal. MC13000	<ul style="list-style-type: none"> Concrete Concrete Block/CMU Cement-Board Siding Brick Stucco Plaster Drywall/Gypsum Board 	<ul style="list-style-type: none"> Wood Plywood Non-Ferrous Metals Architectural Plastics Vinyl/PVC Fiberglass 	<ul style="list-style-type: none"> High-Performance Sealer and Stain Blocker Sticks to Glossy Surfaces High-Hide White Quick Recoat Time Low Odor, GREENGUARD Gold-Certified Zero VOC Tintable
			Vehicle: Acrylic Polymer VOC: < 5 g/L Coverage: 300-400 sq. ft./gal. Dry Time: 30 min. touch; 1 hr. recoat

GREENGUARD is a registered trademark of UL LLC.



KILZ COMPLETE® INTERIOR/EXTERIOR PRIMER, SEALER & STAIN BLOCKER

This fast-dry, interior/exterior oil-based primer blocks severe stains and odors while penetrating and sealing porous surfaces.

Size & Product #	Substrates	Features	Product Info
Lower VOC Version (350 g/L) 1 Gal. L101201 5 Gal. L101205A	<ul style="list-style-type: none"> Concrete Concrete Block/CMU Cement-Board Siding Brick Stucco Drywall/Gypsum Board Wallpaper 	<ul style="list-style-type: none"> Plaster Wood Plywood Ferrous Metals 	<ul style="list-style-type: none"> Mildew-Resistant Coating Blocks Heavy Stains to Prevent Bleed-Through Exceptional Durability Blocks Severe Fire and Smoke Damage Blocks Tannin Bleed from Cedar, Redwood and Other Wood Stains Seals Persistent Smoke, Pet and Food Odors Suitable for Ferrous Metals Like Cast Iron, Wrought Iron and Steel
Regular VOC Version (450 g/L) Aero. L101348 Qt. L101304 1 Gal. L101301 5 Gal. L101305			Vehicle: Alkyd VOC: 450 g/L Coverage: 300-400 sq. ft./gal. Dry Time: 30 min. touch; 1 hr. recoat



KILZ 2® LATEX INTERIOR/EXTERIOR PRIMER, SEALER & STAIN BLOCKER

This is a fast-drying, interior/exterior water-based, multipurpose primer, sealer and stain blocker for vertical surfaces, which may be topcoated with latex or oil-based paint.

Size & Product #	Substrates	Features	Product Info
Qt. MC20902 1 Gal. MC20941 2 Gal. MC20005 5 Gal. MC20000	<ul style="list-style-type: none"> Concrete Concrete Block/CMU Cement-Board Siding Brick Stucco Paneling 	<ul style="list-style-type: none"> Plaster Drywall/Gypsum Board Wood Plywood Non-Ferrous Metals Architectural Plastics 	<ul style="list-style-type: none"> 100% Acrylic Low VOC Mild Odor Resists Stains, Moisture and Wear Exceptional Durability Great for Galvanized Metal
KILZ 2 Latex Gray 1 Gal. MC22941		KILZ 2 Gray (22941) <ul style="list-style-type: none"> Use Less Coats to Help Achieve More Accurate Colors Use Under Dark, Rich Colors Enhanced Hide and Coverage 	Vehicle: Acrylic Polymer VOC: < 50 g/L Coverage: 300-400 sq. ft./gal. Dry Time: 30 min. touch; 1 hr. recoat



KILZ KLEAR® INT/EXT MULTI-SURFACE CLEAR SEALER & BINDER

This is a high-performance interior/exterior multi-surface clear sealer offering a tough, flexible and breathable film. It bonds and seals porous and chalky surfaces, promotes better coverage on same-color paint projects, and can be used on 'hot' stucco with pH levels up to 12.5.

Size & Product #	Substrates	Features	Product Info
1 Gal. L220101 5 Gal. L220105	<ul style="list-style-type: none"> Concrete/Tilt-Up Concrete Block/CMU Cement-Board Siding Brick Stucco Plaster Drywall/Gypsum Board Wood 	<ul style="list-style-type: none"> Plywood Ferrous Metals Non-Ferrous Metals Architectural Plastics Plastics Vinyl/PVC Fiberglass 	<ul style="list-style-type: none"> Effective for Same-Color Painting Bonds to Chalky Surfaces with Little Change to Color Alkali-Resistant Primer and Sealer 100% Acrylic Low VOC Mild Odor Resists Stains, Moisture and Wear Exceptional Durability Great for Galvanized Metal
			Vehicle: Styrene Acrylic VOC: < 100 g/L Coverage: 300-400 sq. ft./gal. Dry Time: 30 min. touch; 1 hr. recoat



KILZ® ORIGINAL PRIMER, SEALER & STAIN BLOCKER

This fast-dry, interior oil-based primer blocks severe stains and odors while penetrating and sealing porous surfaces.

Size & Product #	Substrates	Features	Product Info
Lower VOC Version (350 g/L) Qt. MC10932 1 Gal. MC10936 5 Gal. MC10030	<ul style="list-style-type: none"> Concrete Concrete Block/CMU Brick Plaster 	<ul style="list-style-type: none"> Wood Ferrous Metals Wallpaper Drywall Masonry Paneling 	<ul style="list-style-type: none"> Blocks Heavy Interior Stains Blocks Interior Water, Smoke and Tannin Stains Seals Odors Seals Porous Surfaces for Better Paint Coverage Sands Easily Great Enamel Undercoater
Regular VOC Version (450 g/L) Aero MC10004-pk/12 Aero MC10044-pk/24 Qt. MC10902 1 Gal. MC10901 5 Gal. MC10000			<ul style="list-style-type: none"> Vehicle: Modified Alkyd VOC: 450 g/L Coverage: 300-400 sq. ft./gal. Dry Time: 30 min. touch; 1 hr. recoat



KILZ ADHESION INTERIOR/EXTERIOR BONDING PRIMER & SEALER

A water-based, modified-acrylic primer specifically formulated to bond to a variety of tough-to-paint surfaces.

Size & Product #	Substrates	Features	Product Info
Qt. L211104 1 Gal. L211101	<ul style="list-style-type: none"> Concrete Concrete Block/CMU Cement-Board Siding Brick Stucco Plaster 	<ul style="list-style-type: none"> Drywall/Gypsum Board Wood Plywood Wood Composites Ferrous Metals Non-Ferrous Metals 	<ul style="list-style-type: none"> Architectural Plastics Vinyl/PVC Chalky Surfaces Glazed Tile Glass
	<ul style="list-style-type: none"> Paneling and Laminates Fiberglass Anodized Aluminum Kynar® Factory Finishes 	<ul style="list-style-type: none"> Bonds to Hard-to-Adhere Surfaces Superior Adhesion for Topcoat on Tough-to-Paint Surfaces Interior/Exterior Mildew-Resistant Finish Resists Stains, Moisture and Wear Exceptional Durability 	<ul style="list-style-type: none"> Vehicle: Styrenated-Acrylic Polymer VOC: < 100 g/L Coverage: 300-400 sq. ft./gal. Dry Time: 30 min. touch; 1 hr. recoat



KILZ MAX INTERIOR PRIMER, SEALER & STAIN BLOCKER

Advanced interior water-based technology. Performs like an oil and shellac, but with easy water cleanup. Blocks severe stains including water damage, rust, smoke, nicotine and tannin. Also blocks food and pet odors.

Size & Product #	Substrates	Features	Product Info
1 Gal. L200201 5 Gal. L200205	<ul style="list-style-type: none"> Concrete Concrete Block/CMU Drywall/Gypsum Board Plaster 	<ul style="list-style-type: none"> Wood Brick Non-Ferrous Metals Subfloor 	<ul style="list-style-type: none"> Shellac and Oil Performance in a Water Base Seals Water-Soluble Stains Blocks Persistent Odors Easy Spray Low Odor Fast Dry
			<ul style="list-style-type: none"> Vehicle: Acrylic Modified Epoxy VOC: < 75 g/L Coverage: 300-400 sq. ft./gal. Dry Time: 30 min. touch; 1 hr. recoat

Interior

Special-Function Primers



BEHR PREMIUM® CONCRETE & MASONRY BONDING PRIMER

This interior/exterior high-performance, ready-to-use, water-based epoxy pretreatment is designed to promote adhesion between the surface and topcoat. Proper application results in excellent resistance to water, alkali and efflorescence.

Size & Product #	Substrates	Features	Product Info
1 Gal. 88001	<ul style="list-style-type: none"> Concrete Concrete Block/CMU Cement-Board Siding 	<ul style="list-style-type: none"> Brick Stucco Plaster 	<ul style="list-style-type: none"> Horizontal Surfaces Prevents Peeling of Topcoat Easy to Apply Promotes a Uniform Topcoat Finish
			<ul style="list-style-type: none"> Vehicle: Epoxy/Acrylic VOC: < 100 g/L Coverage: 350-500 sq. ft./gal. Dry Time: 2 hrs. touch; 4 hrs. recoat



KILZ MAX CLEAR PRIMER, SEALER & STAIN BLOCKER

Clear primer, sealer and stain blocker that performs like an oil or shellac in a water base. Ideal clear sealer for interior surfaces under construction, including subfloors, drywall, rafters and wall cavities. Seals persistent pet and smoke odors.

Size & Product #	Substrates	Features	Product Info
1 Gal. L200401 5 Gal. L200405	<ul style="list-style-type: none"> Concrete Concrete Block/CMU Drywall/Gypsum Board Plaster Wood 	<ul style="list-style-type: none"> Brick Non-Ferrous Metals Subfloor Wall Cavities 	<ul style="list-style-type: none"> Blocks Severe Odors Dries to a Clear, Transparent Finish Mildew-Resistant Finish Advanced Technology Stain and Odor Blocker Suitable for Disaster Restoration Nonflammable Low Odor Low VOC
			<ul style="list-style-type: none"> Vehicle: Epoxy Modified Acrylic VOC: < 100 g/L Coverage: 300-400 sq. ft./gal. Dry Time: 30 min. touch; 1 hr. recoat



BEHR PREMIUM PLUS® INTERIOR DRYWALL PRIMER & SEALER

This tintable interior primer and sealer is 100% acrylic, seals coated and uncoated surfaces, and is high-hide white with a quick recoat time.

Size & Product #	Substrates	Features	Product Info
1 Gal. 7301 5 Gal. 7305	<ul style="list-style-type: none"> Drywall/Gypsum Board Plaster Wood Wallboard 	<ul style="list-style-type: none"> Seals Coated and Uncoated Porous Surfaces 100% Acrylic High-Hide White Quick Recoat Time Tintable For Use Under Low Sheens 	<ul style="list-style-type: none"> Vehicle: 100% Acrylic VOC: < 50 g/L Coverage: 250-400 sq. ft./gal. Dry Time: 30 min. touch; 1 hr. recoat



KILZ ODORLESS® INTERIOR PRIMER, SEALER & STAIN BLOCKER

This fast-dry interior oil-based primer blocks heavy stains with no lingering odor.

Size & Product #	Substrates	Features	Product Info
Aero. 10444 1 Gal. MC10941 5 Gal. 10040	<ul style="list-style-type: none"> Drywall/Gypsum Board Wood Plaster Concrete 	<ul style="list-style-type: none"> Concrete Block/CMU Non-Ferrous Metals Brick Paneling 	<ul style="list-style-type: none"> Traditional Oil Formula No Lingering Odor Bright-White; Non-Yellowing Blocks Interior Water, Smoke and Tannin Stains
			<ul style="list-style-type: none"> Vehicle: Solution Acrylic VOC: 350 g/L Coverage: 300-400 sq. ft./gal. Dry Time: 30 min. touch; 1 hr. recoat

Kynar® is a registered trademark of Arkema Inc. ©2014 Arkema Inc. All rights reserved.



KILZ® PVA INTERIOR DRYWALL PRIMER & SEALER

This high-hide, low-cost basic interior primer is designed to prime and seal new drywall and reduce the number of topcoats required to achieve a uniform, professional-quality finish.

Size & Product #	Substrates	Features	Product Info
1 Gal. PX01001 5 Gal. PX01005	<ul style="list-style-type: none"> New Drywall 	<ul style="list-style-type: none"> Fast Drying Seals Porous Surfaces Easy Cleanup 	Vehicle: PVA VOC: < 50 g/L Coverage: 250-400 sq. ft./gal. Dry Time: 30 min. touch; 1 hr. recoat



KILZ UPSHOT® AEROSOL INTERIOR SEALER

A vertical-spray aerosol for blocking severe overhead water stains.

Size & Product #	Substrates	Features	Product Info
Aero. MC10007	<ul style="list-style-type: none"> Drywall/Gypsum Board Plaster Concrete Brick 	<ul style="list-style-type: none"> Wood Non-Ferrous Metals Paneling Wallpaper 	<ul style="list-style-type: none"> Vertical Spray Tip Tinted to Match Most Aged Acoustic Ceiling Tiles Vehicle: Modified Alkyd Max Product Weighted MIR: 0.7 Coverage: 14-19 sq. ft./gal. Dry Time: 15-30 min. touch; 1 hr. recoat



BEHR PRO™ BLOCK FILLER PRIMER

An interior/exterior latex primer designed for above-grade use on concrete block, cinder block, and poured or precast concrete. It's formulated to fill and seal porous masonry surfaces, reduce pinholing, and help produce a smooth and even topcoat.

Size & Product #	Substrates	Features	Product Info
5 Gal. PR5005	<ul style="list-style-type: none"> Concrete Concrete Block/CMU Cement-Board Siding 	<ul style="list-style-type: none"> Brick Stucco Plaster 	<ul style="list-style-type: none"> Vertical/Horizontal Surfaces Prevents Peeling of Topcoat Meets Federal Standard TT-C-555B Promotes a Uniform Topcoat Finish Vehicle: Acrylic Copolymer VOC: < 50 g/L Coverage: 75-150 sq. ft./gal. Dry Time: 1 hr. touch; 2 hrs. recoat



BEHR PRO HIGH BUILD INTERIOR PRIMER

High build interior primer can save you time by combining skim coat and priming steps in one spray application. Provides a Level 5 finish over new drywall when prepared to a Level 4 finish.

Size & Product #	Substrates	Features	Product Info
5 Gal. PR4005	<ul style="list-style-type: none"> Drywall Plaster Wood 	<ul style="list-style-type: none"> Seals Bare Wood 100% Acrylic High-Hide White Quick Recoat Time Tintable For Use Under Low Sheens 	Vehicle: PVA VOC: < 50 g/L Coverage: 75-100 sq. ft./gal. Dry Time: 1 hr. touch; 4-8 hrs. recoat

Interior

Wall & Trim Paints



BEHR MARQUEE® INTERIOR PAINT

MARQUEE®

This product is our most advanced stain-blocking interior paint and primer in one, delivering high-performance one-coat hide with every color in the exclusive MARQUEE Interior One-Coat Color Collection* and a selected number of colors from other Behr color palettes.

Features

- Now Available in More Than 1,000 One-Coat Hide Colors*
- Superior Durability and Stain Resistance
- Scrubable, Easy-Clean Finish
- Antimicrobial, Mildew-Resistant Finish
- Low VOC
- 100% Acrylic

Substrates

Properly prepared, primed or previously painted:

- Concrete
- Concrete Block/CMU
- Brick
- Plaster
- Drywall/Gypsum Board
- Wood
- Ferrous Metals
- Galvanized Steel
- Aluminum
- Other Non-Ferrous Metals

*For details and limitations, visit behr.com/marquee-guarantee

Sheen	Tint Base	No.	Qt.	1 Gal.	5 Gal.	Product Info
Matte	ULTRA PURE WHITE®	1450	•	•	•	Sheen: 2-5 @ 85° Gloss: 2-5 @ 60° Vehicle: 100% Acrylic Latex VOC: < 50 g/L Coverage: up to 400 sq. ft./gal. Dry Time: 1 hr. touch; 2 hrs. recoat
	Medium	1454	•	•		
	Deep	1453	•	•		
Eggshell	ULTRA PURE WHITE	2450	•	•	•	Sheen: 17-22 @ 85° Gloss: 7-12 @ 60° Vehicle: 100% Acrylic Latex VOC: < 50 g/L Coverage: up to 400 sq. ft./gal. Dry Time: 1 hr. touch; 2 hrs. recoat
	Medium	2454	•	•		
	Deep	2453	•	•		
Satin	ULTRA PURE WHITE	7450	•	•	•	Sheen: > 35 @ 85° Gloss: 15-25 @ 60° Vehicle: 100% Acrylic Latex VOC: < 50 g/L Coverage: up to 400 sq. ft./gal. Dry Time: 1 hr. touch; 2 hrs. recoat
	Medium	7454	•	•		
	Deep	7453	•	•		
Semi-Gloss	ULTRA PURE WHITE	3450	•	•	•	Gloss: 45-55 @ 60° Vehicle: 100% Acrylic Latex VOC: < 50 g/L Coverage: up to 400 sq. ft./gal. Dry Time: 1 hr. touch; 2 hrs. recoat
	Medium	3454	•	•		
	Deep	3453	•	•		

BEHR PREMIUM PLUS ULTRA® INTERIOR PAINT



This 100% acrylic paint and primer in one, advanced stain-blocking formula is the perfect choice for high-traffic rooms, delivering excellent hide in fewer coats. Formulated with NANOGUARD® Technology.

Features

- Excellent Hide in Fewer Coats
- Stain and Scuff Resistant
- Antimicrobial, Mildew-Resistant Finish
- Washable, Easy-Clean Finish
- Low VOC
- 100% Acrylic

Substrates

Properly prepared, primed or previously painted:

- Concrete
- Concrete Block/CMU
- Brick
- Plaster
- Drywall/Gypsum Board
- Wood
- Ferrous Metals
- Galvanized Steel
- Aluminum
- Other Non-Ferrous Metals

Sheen	Tint Base	No.	Qt.	1 Gal.	5 Gal.	Product Info
Matte	ULTRA PURE WHITE®	1750	●	●	●	Sheen: 2-5 @ 85° Gloss: 2-5 @ 60° Vehicle: 100% Acrylic Latex < 50 g/L VOC: 250-400 sq. ft./gal. Dry Time: 1 hr. touch; 2 hrs. recoat
	Medium	1754	●	●	●	
	Deep	1753	●	●	●	
Eggshell	ULTRA PURE WHITE	2750	●	●	●	Sheen: 17-22 @ 85° Gloss: 7-12 @ 60° Vehicle: 100% Acrylic Latex < 50 g/L VOC: 250-400 sq. ft./gal. Dry Time: 1 hr. touch; 2 hrs. recoat
	Medium	2754	●	●	●	
	Deep	2753	●	●	●	
Satin	ULTRA PURE WHITE	7750	●	●	●	Sheen: > 35 @ 85° Gloss: 15-25 @ 60° Vehicle: 100% Acrylic Latex < 50 g/L VOC: 250-400 sq. ft./gal. Dry Time: 1 hr. touch; 2 hrs. recoat
	Medium	7754	●	●	●	
	Deep	7753	●	●	●	
Semi-Gloss	ULTRA PURE WHITE	3750	●	●	●	Gloss: > 75 @ 60° Vehicle: 100% Acrylic Latex < 50 g/L VOC: 250-400 sq. ft./gal. Dry Time: 1 hr. touch; 2 hrs. recoat
	Medium	3754	●	●	●	
	Deep	3753	●	●	●	

BEHR PREMIUM PLUS® INTERIOR PAINT



This GREENGUARD® Gold-certified interior paint and primer in one is 100% acrylic, provides a mildew-resistant finish, and is suitable for use in residential and commercial properties. Its finish resists dirt and grime, stands up to vigorous cleaning, and provides exceptional durability, hide and appearance.

Features

- Low Odor, Zero VOC (most products) and GREENGUARD Gold Certified
- Exceptional Durability
- Easy-Clean
- Easy to Apply
- Excellent Touch-Up
- 100% Acrylic
- Mildew-Resistant Finish

Substrates

Properly prepared, primed or previously painted:

- Concrete
- Concrete Block/CMU
- Brick
- Plaster
- Drywall/Gypsum Board
- Wood
- Ferrous Metals
- Galvanized Steel
- Aluminum
- Other Non-Ferrous Metals

Sheen	Tint Base/Pre-Mix	No.	Qt.	1 Gal.	5 Gal.	Product Info
Flat	ULTRA PURE WHITE®	1050	●	●	●	Sheen: 0-4 @ 85° Vehicle: 100% Acrylic Latex VOC: < 5 g/L Coverage: 250-400 sq. ft./gal. Dry Time: 1 hr. touch; 2 hrs. recoat
	Medium	1400	●	●	●	
	Deep	1300	●	●	●	
Eggshell	ULTRA PURE WHITE	2050	●	●	●	Sheen: 7-12 @ 60° Vehicle: 100% Acrylic Latex < 5 g/L VOC: 250-400 sq. ft./gal. Dry Time: 1 hr. touch; 2 hrs. recoat
	Medium	2400	●	●	●	
	Deep	2300	●	●	●	
Satin	ULTRA PURE WHITE	7050	●	●	●	Sheen: 15-25 @ 60° Vehicle: 100% Acrylic Latex < 5 g/L VOC: 250-400 sq. ft./gal. Dry Time: 1 hr. touch; 2 hrs. recoat
	Medium	7400	●	●	●	
	Deep	7300	●	●	●	
Semi-Gloss	ULTRA PURE WHITE	3050	●	●	●	Sheen: 45-55 @ 60° Vehicle: 100% Acrylic Latex < 5 g/L VOC: 250-400 sq. ft./gal. Dry Time: 1 hr. touch; 2 hrs. recoat
	Medium	3400	●	●	●	
Hi-Gloss	ULTRA PURE WHITE	8050	●	●	●	Sheen: 45+ @ 20°; 75+ @ 60° Vehicle: 100% Acrylic Latex < 150 g/L VOC: 250-400 sq. ft./gal. Dry Time: 1 hr. touch; 2 hrs. recoat
	Medium	8400	●	●	●	
	Deep	8300	●	●	●	
	Red	8610	●	●	●	
	Black	8620	●	●	●	
	ULTRA PURE WHITE	28050	●	●	●	Sheen: 45+ @ 20°; 75+ @ 60° Vehicle: 100% Acrylic Latex < 50 g/L VOC: 250-400 sq. ft./gal. Dry Time: 1 hr. touch; 2 hrs. recoat
	Medium	28400	●	●	●	
	Deep	28300	●	●	●	
	Red	28610	●	●	●	
	Black	28620	●	●	●	

GREENGUARD is a registered trademark of UL LLC.

BEHR PRO™ i300 INTERIOR PAINT



A professional-quality, GREENGUARD® Gold-certified, non-reflective latex paint with superior coverage. Perfect for hiding surface imperfections, it offers excellent sprayability and superior touch-up, and its dried film is mildew resistant.

Features

- Versatile Application; Spray, Brush or Roll
- Superior Hide and Coverage
- Excellent Touch-Up
- Low Odor and GREENGUARD Gold Certified
- Zero VOC

Substrates

- Properly prepared, primed or previously painted:
- Concrete
 - Concrete Block/CMU
 - Brick
 - Plaster
 - Drywall/Gypsum Board
 - Wood
 - Plywood
 - Ferrous Metals
 - Non-Ferrous Metals
 - Architectural Plastics

Sheen	Tint Base	No.	1 Gal.	5 Gal.	Product Info
Dead Flat	White	PR310	●	●	Sheen: 0-3 @ 85° Gloss: 0-3 @ 60° Vehicle: 100% VAE VOC: < 5 g/L Coverage: 300-400 sq. ft./ gal. Dry Time: 1 hr. touch; 2 hrs. recoat
	Medium	PR314	●	●	
	Deep	PR313	●	●	
Eggshell	White	PR330	●	●	Sheen: 10-20 @ 85° Gloss: 10-15 @ 60° Vehicle: 100% VAE VOC: < 5 g/L Coverage: 300-400 sq. ft./ gal. Dry Time: 1 hr. touch; 2 hrs. recoat
	Medium	PR334	●	●	
	Deep	PR333	●	●	
Semi-Gloss	White	PR370	●	●	Gloss: 35-45 @ 60° Vehicle: VAE/Acrylic Blend VOC: < 5 g/L Coverage: 300-400 sq. ft./ gal. Dry Time: 1 hr. touch; 2 hrs. recoat
	Medium	PR374	●	●	
	Deep	PR373	●	●	

GREENGUARD is a registered trademark of UL LLC.

BEHR PRO™ i100 INTERIOR PAINT



A production-grade latex paint line providing strong performance in spray and back-roll application and ability to touch up.

Features

- Sprayability
- High Hide
- Good Touch-Up

Substrates

- Properly prepared, primed or previously painted:
- Concrete
 - Concrete Block/CMU
 - Brick
 - Plaster
 - Drywall
 - Wood
 - Plywood
 - Ferrous Metals
 - Non-Ferrous Metals
 - Architectural Plastics

Sheen	Tint Base	No.	1 Gal.	5 Gal.	Product Info
Dead Flat	White	PR105	●	●	Sheen: 0-2 @ 85° Gloss: 0-2 @ 60° Vehicle: PVA VOC: < 50 g/L Coverage: 300-400 sq. ft./ gal. Dry Time: 1 hrs. touch; 2 hrs. recoat
		PR110	●	●	Sheen: 0-2 @ 85° Gloss: 0-2 @ 60° Vehicle: PVA VOC: < 50 g/L Coverage: 300-400 sq. ft./ gal. Dry Time: 2 hrs. touch; 4 hrs. recoat
Eggshell	White	PR130	●	●	Sheen: 10-22 @ 85° Gloss: 5-11 @ 60° Vehicle: PVA VOC: < 50 g/L Coverage: 300-400 sq. ft./ gal. Dry Time: 1 hr. touch; 2 hrs. recoat
Semi-Gloss	White	PR170	●	●	Gloss: 35-50 @ 60° Vehicle: PVA/Acrylic Blend VOC: < 50 g/L Coverage: 300-400 sq. ft./ gal. Dry Time: 1 hr. touch; 2 hrs. recoat



BEHR® OIL-BASE SEMI-GLOSS ENAMEL

This paint formula provides a professional-quality, mildew-resistant finish and will help protect both interior and exterior surfaces from scuffs, rust and household chemicals.

Sheen	Tint Base	No.	Qt.	1 Gal.	5 Gal.	Substrates	Features	Product Info	
Semi-Gloss	White	3800	●	●	●	<ul style="list-style-type: none"> Concrete Concrete Block/CMU Cement-Board Siding Brick 	<ul style="list-style-type: none"> Stucco Plaster Wood Plywood Non-Ferrous Metals 	<ul style="list-style-type: none"> Excellent Flow and Leveling Resists Household Chemicals Easy Stain Removal 	Gloss: 45-55 @ 60° after 14-day cure Vehicle: Alkyd VOC: < 380 g/L Coverage: 350-550 sq. ft./gal. Dry Time: 4-5 hrs. touch; 24 hrs. recoat
	Deep	3830	●	●	●				



BEHR ALKYD SEMI-GLOSS ENAMEL

This interior/exterior product provides the performance and durability of a traditional oil-based paint with the ease of use and convenience of a water-based paint. The professional-quality finish offers excellent flow and leveling with easy water cleanup.

Sheen	Tint Base	No.	1 Gal.	Substrates	Features	Product Info	
Semi-Gloss	White	3900	●	<ul style="list-style-type: none"> Concrete Concrete Block/CMU Cement-Board Siding Brick Stucco 	<ul style="list-style-type: none"> Plaster Wood Plywood Ferrous Metals Non-Ferrous Metals 	<ul style="list-style-type: none"> Excellent Flow and Leveling Less Odor than Oil-Based Paint Easy Water Cleanup Resists Household Chemicals Durable, Hard Finish Easy Stain Removal Mildew-Resistant Finish 	Gloss: 45-60 @ 60° after 14-day cure Vehicle: Alkyd VOC: < 50 g/L Coverage: 350-550 sq. ft./gal. Dry Time: 2-4 hrs. touch; 4-8 hrs. recoat
	Deep	3930	●				



BEHR PREMIUM® INTERIOR/EXTERIOR DIRECT-TO-METAL PAINT

This acrylic paint provides excellent corrosion and flash rust resistance. Engineered for excellent adhesion to a variety of properly prepared or primed residential and light-commercial metal surfaces.

Sheen	Tint Base/Pre-Mix	No.	1 Gal.	5 Gal.	Substrates	Features	Product Info
Semi-Gloss	White	3200	●	●	<ul style="list-style-type: none"> Ferrous Metals Non-Ferrous Metals Wood 	<ul style="list-style-type: none"> Excellent Adhesion Durable, Hard Finish Corrosion Resistant 	Gloss: 45-55 @ 60° Vehicle: Styrene Acrylic VOC: < 100 g/L Coverage: 350-400 sq. ft./gal. Dry Time: 1 hr. touch; 3 hrs. recoat
	Deep	3230	●	●			
	Red	3210	●				
	Black	3220	●	●			
	Yellow	3214	●				
Gloss	White	8200	●	●			Gloss: > 70 @ 60° Vehicle: Styrene Acrylic VOC: < 100 g/L Coverage: 350-400 sq. ft./gal. Dry Time: 1 hr. touch; 3 hrs. recoat
	Deep	8230	●	●			
	Red	8210	●				
	Black	8220	●	●			
	Yellow	8214	●	●			



BEHR MASONRY, STUCCO & BRICK PAINT

A high-quality acrylic latex paint with excellent hiding properties. This water-based interior/exterior self-priming paint creates a mildew-resistant finish and provides excellent adhesion and water repellency on smooth, rough and textured vertical surfaces.

Sheen	Tint Base	No.	1 Gal.	5 Gal.	Substrates	Features	Product Info	
Flat	White	270	●	●	<ul style="list-style-type: none"> Concrete Concrete Block/CMU 	<ul style="list-style-type: none"> Cement-Board Siding Brick Stucco 	<ul style="list-style-type: none"> Self-Priming Acrylic Latex Alkali Resistant Mildew-Resistant Finish Excellent Coverage 	Sheen: < 5 @ 85° Vehicle: Acrylic Latex Coverage: 250-400 sq. ft./gal. Dry Time: 1 hr. touch; 2-4 hrs. recoat
	Deep	272	●	●				Gloss: < 5 @ 60° VOC: < 50 g/L
Satin	White	280	●	●			Sheen: > 35 @ 85° Vehicle: Acrylic Latex Coverage: 250-400 sq. ft./gal. Dry Time: 1 hr. touch; 2-4 hrs. recoat	
	Deep	282	●	●				

Interior

Ceiling & Floor Paints



BEHR PREMIUM PLUS ULTRA® INTERIOR STAIN-BLOCKING CEILING PAINT

This low-VOC, stain-blocking ceiling paint is spatter and drip resistant. A high-performance paint and primer in one, it blocks most household and water stains, and dries to form an antimicrobial, mildew-resistant finish.

Size & Product #	Substrates	Features	Product Info
1 Gal. 555801	<ul style="list-style-type: none"> Drywall/Gypsum Board Cured Plaster Cured Masonry 	<ul style="list-style-type: none"> Excellent Hide Extra-Durable Paint Film Tintable to Light Colors Antimicrobial, Mildew-Resistant Finish Spatter and Drip Resistant Non-Reflective Matte Appearance Low VOC 	Sheen: 0-3 @ 85° Vehicle: 100% Styrene Acrylic VOC: < 50 g/L Coverage: 250-400 sq. ft./gal. Dry Time: 1 hr. touch; 2 hrs. recoat



BEHR PREMIUM PLUS® INTERIOR CEILING PAINT

This product delivers a tough acrylic-latex finish formulated to be spatter resistant when applied to interior textured, popcorn, and acoustic-style ceilings. And it hides surface imperfections for greater coverage.

Size & Product #	Substrates	Features	Product Info
Qt. 55804	<ul style="list-style-type: none"> Drywall/Gypsum Board Cured Plaster Cured Masonry 	<ul style="list-style-type: none"> Low Odor Low VOC Spatter Resistant Minimizes Glare and Imperfections Mildew Resistant Finish Tintable to Light Colors Non-Reflective Matte Appearance 	Sheen: 0-3 @ 85° Vehicle: Acrylic Latex VOC: < 50 g/L Coverage: 250-400 sq. ft./gal. Dry Time: 1 hr. touch; 2 hrs. recoat
1 Gal. 55801			
2 Gal. 55802			
5 Gal. 55805			



KILZ® CEILING PAINT

This is a stain-blocking paint and primer in one that is low odor and zero VOC. It blocks out most common ceiling stains and rolls on easily with minimal spattering.

Size & Product #	Substrates	Features	Product Info
1 Gal. 68101	<ul style="list-style-type: none"> Drywall/Gypsum Board Plaster Concrete Wood 	<ul style="list-style-type: none"> Minimal Spattering Easy Application Stain-Blocking Technology 	Sheen: < 2.5 @ 85° Vehicle: Acrylic Copolymer VOC: < 5 g/L Coverage: 300-400 sq. ft./gal. Dry Time: 30 min. touch; 2-4 hrs. recoat
5 Gal. 68105			



BEHR PRO™ DRYFALL PAINT

Dryfall is a high-hide, high-reflectance acrylic coating with flash rust resistance. Spray applied, it settles into a sweepable dust within 10 feet from ceiling surface. Perfect for warehouses, retail outlets, sports venues, and other commercial spaces.

Sheen	Tint Base/Pre-Mix	No.	5 Gal.	Substrates	Features	Product Info
Flat	White	PR890	●	<ul style="list-style-type: none"> • Drywall/Gypsum Board • Concrete • Plaster • Wood • Ferrous Metals • Non-Ferrous Metals 	<ul style="list-style-type: none"> • Falls Dry in 10' • High Hide and High Build • Flash Rust Resistance 	Sheen: < 5 @ 85° Vehicle: Acrylic VOC: < 50 g/L Coverage: up to 375 sq. ft./gal. Dry Time: 30 min. touch; 1 hr. recoat
	Black	PR891	●			



BEHR PREMIUM® 1-PART EPOXY ACRYLIC CONCRETE & GARAGE FLOOR PAINT

This interior/exterior high-performance, ready-to-use, water-based product provides a finish that is highly resistant to most chemicals, automotive fluids, hot-tire pick-up, marring, scuffing, fading, cracking, peeling and blistering.

Sheen	Tint Base/Pre-Mix	No.	1 Gal.	5 Gal.	Substrates	Features	Product Info
Satin	White	900	●	●	<ul style="list-style-type: none"> • Porous Concrete • Masonry 	<ul style="list-style-type: none"> • Interior/Exterior • Easy, No-Mix Formula • Resists Chemicals and Hot-Tire Pick-Up • Slip-Resistant, Satin Finish 	Sheen: 40-60 @ 85° Gloss: 15-25 @ 60° Vehicle: Epoxy/Acrylic VOC: < 50 g/L Coverage: 300-500 sq. ft./gal. Dry Time: 1 hr. touch; 4-6 hrs. recoat
	Deep	930	●	●			
	Slate Gray	902	●	●			



BEHR PREMIUM PORCH & PATIO FLOOR PAINT

Get a durable, long-lasting finish with this 100% acrylic-latex, mildew-resistant paint film. This finish is ideal for both interior and exterior applications. It resists scuffing, fading, cracking and peeling. Use on concrete and wood surfaces.

Sheen	Tint Base/Pre-Mix	No.	1 Gal.	5 Gal.	Substrates	Features	Product Info
Low Lustre	White	6050	●		<ul style="list-style-type: none"> • Wood • Concrete • Composite 	<ul style="list-style-type: none"> • Interior/Exterior • Resists Scuffing, Fading, Cracking and Peeling • Mildew-Resistant Finish • 100% Acrylic Latex 	Sheen: 5-15 @ 85° Gloss: 5-15 @ 60° Vehicle: 100% Acrylic Latex VOC: < 50 g/L Coverage: 200-400 sq. ft./gal. Dry Time: 1 hr. touch; 4-6 hrs. recoat
	Deep	6300	●				
	Slate Gray	6695	●	●			
Gloss	White	6705	●				Gloss: 65+ @ 60° Vehicle: 100% Acrylic Latex VOC: < 100 g/L Coverage: 200-400 sq. ft./gal. Dry Time: 1 hr. touch; 4-6 hrs. recoat
	Deep	6730	●				
	Slate Gray	6795	●	●			



BEHR PREMIUM GRANITE GRIP™ COATING

This interior/exterior product can fill hairline cracks and revive concrete surfaces while providing a durable, protective finish. It is ideal for horizontal surfaces such as walkways, patios, porches and pool decks.

Sheen	Color	No.	1 Gal.	5 Gal.	Substrates	Features	Product Info
Flat	Gray	650	●	●	<ul style="list-style-type: none"> • Porous Concrete • Masonry • Stone • Brick 	<ul style="list-style-type: none"> • Revives Concrete Surfaces • Durable, Protective Finish • Available in Custom Colors • Fills in Hairline Cracks • Resists Dirt, Grease and Household Stains 	Sheen: < 10 @ 85° Gloss: < 10 @ 60° Vehicle: Acrylic VOC: < 50 g/L Coverage: 40-60 sq. ft./gal. (2 coats) Dry Time: 1 hr. touch; 3-4 hrs. recoat
Flat	Tan	655	●	●			



BEHR PREMIUM DECKOVER® WOOD & CONCRETE COATING

Bring new life to old wood and concrete horizontal and vertical surfaces. This interior/exterior 100% acrylic formula conceals splinters and cracks up to 1/4" and creates a slip-resistant finish that also resists cracking and peeling. Available in 54 custom solid colors.

Finish	Tint Base	No.	1 Gal.	5 Gal.	Substrates	Features	Product Info
Smooth	Deep	5000	●	●	<ul style="list-style-type: none"> • Wood • Composite • Concrete 	<ul style="list-style-type: none"> • Resists Cracking and Peeling • Durable, Mildew-Resistant Finish • Waterproofing, Solid-Color Coating • Revives Wood and Composite Decks, Railings, Porches and Boat Docks • Great for Concrete Pool Decks, Patios and Sidewalks 	Sheen: 40-60 @ 85° Gloss: 15-25 @ 60° Vehicle: 100% Acrylic VOC: < 50 g/L Coverage: 75 sq. ft./gal. (2 coats) Dry Time: 4-6 hrs. recoat; 24-48 hrs. light foot traffic



BEHR PREMIUM CONCRETE STAINS

These durable, flat-finish, water-repellent, solid-color and semi-transparent stains are designed to help protect and enhance vertical and horizontal interior and exterior concrete surfaces.

Opacity	Tint Base	No.	1 Gal.	5 Gal.	Substrates	Features	Product Info
Solid Color	White	800	●	●	<ul style="list-style-type: none"> • Concrete • Brick • Masonry 	<ul style="list-style-type: none"> • Interior/Exterior • Siliconized 100% Acrylic • Resists Chemicals and Hot-Tire Pick-up • Flat Finish 	Sheen: 5-10 @ 85° Vehicle: Siliconized 100% Acrylic VOC: < 100 g/L Coverage: 400-600 sq. ft./gal. Dry Time: 2 hrs. touch; 2-4 hrs. recoat
	Deep	830	●	●			
Semi-Transparent	Tint Base	850	●				Vehicle: Siliconized 100% Acrylic VOC: < 100 g/L Coverage: 250-500 sq. ft./gal. Dry Time: 1 hr. touch; 4 hrs. recoat



BEHR PREMIUM® DECORATIVE CONCRETE DYE

A unique decorative finish that adds depth and warmth to your home by transforming ordinary concrete into a beautiful and luxurious floor resembling a natural, marble-stone finish.

Size & Product #	Substrates	Features	Product Info
Qt. 86304 1 Gal. 86301	<ul style="list-style-type: none"> Concrete Concrete Block/CMU Brick 	<ul style="list-style-type: none"> Interior/Exterior Available in Single- and Custom-Color Combinations Water Based Acid-Free 	Vehicle: Acrylic VOC: < 120 g/L Coverage: 175-250 sq. ft./gal. Dry Time: 1-2 hrs touch; 24 hrs before applying required clear topcoat



BEHR PREMIUM BASEMENT & MASONRY WATERPROOFER

This waterproofer is a durable, water-repellent, solid-color topcoat designed to help protect and enhance both interior and exterior vertical concrete surfaces.

Size & Product #	Substrates	Features	Product Info
1 Gal. 87501 5 Gal. 87505	<ul style="list-style-type: none"> Concrete Concrete Block/CMU Cement-Board Siding Brick Stucco Drywall/Gypsum Board 	<ul style="list-style-type: none"> Withstands 12 PSI of Water Pressure Mildew-Resistant Film Smooth, Flat Finish Withstands 98 MPH Wind-Driven Rain 100% Styrene Acrylic Spray and Roll Application Perm Rating < 1.0 	Sheen: < 5 @ 85° Vehicle: 100% Styrene-Acrylic Latex VOC: < 100 g/L Coverage: 75-125 sq. ft./gal. Dry Time: 1 hr. touch; 4 hrs. recoat



BEHR PREMIUM WET-LOOK SEALER

Protect and seal concrete and masonry surfaces with this non-yellowing, high-solids, acrylic-based masonry sealer. It's an ideal topcoat for concrete and pavers and provides a high-gloss, wet-look finish.

Size & Product #	Substrates	Features	Product Info
1 Gal. 98501 5 Gal. 98505	<ul style="list-style-type: none"> Concrete Unglazed Tile Brick Aggregate Natural and Artificial Stone Pavers 	<ul style="list-style-type: none"> Non-Yellowing Acrylic-Based High-Gloss Finish 	Gloss: 55-70 @ 20°, 80-90 @ 60° Vehicle: Acrylic VOC: < 100 g/L Coverage: 200-450 sq. ft./gal. Dry Time: 1 hr. touch; 4 hrs. recoat



BEHR PREMIUM LOW-LUSTRE SEALER

This sealer provides a low-gloss finish while sealing and protecting concrete and masonry. A non-yellowing, high-solids, acrylic-based masonry sealer, this product is an outstanding topcoat for concrete and pavers.

Size & Product #	Substrates	Features	Product Info
1 Gal. 98601	<ul style="list-style-type: none"> Concrete Unglazed Tile Brick Aggregate Natural and Artificial Stone Pavers 	<ul style="list-style-type: none"> Non-Yellowing Acrylic-Based Low-Gloss Finish 	Gloss: 15-25 @ 60° Vehicle: Acrylic VOC: < 100 g/L Coverage: 200-450 sq. ft./gal. Dry Time: 1 hr. touch; 4 hrs. recoat



BEHR PREMIUM CONCRETE & MASONRY PROTECTOR & WATERPROOFER

Formulated with water-based silicone technology, this product is designed to penetrate surfaces up to 1/2" to help protect against corrosion, spalling, efflorescence, and freeze-thaw damage.

Size & Product #	Substrates	Features	Product Info
1 Gal. 98001 5 Gal. 98005	<ul style="list-style-type: none"> Concrete Unglazed Tile Brick Aggregate Pavers Stucco 	<ul style="list-style-type: none"> Silicone Formulated Shields Against Salt Damage and Corrosion Spalling Protection Efflorescence Protection Freeze-Thaw Damage Protection 	Vehicle: Silane/Siloxane VOC: < 120 g/L Coverage: 250 sq. ft./gal. Dry Time: 24-48 hrs. recoat

Interior

Decorative Paints



BEHR PREMIUM PLUS WITH STYLE® FAUX GLAZE

This unique water-based, translucent product is designed for blending with our interior BEHR MARQUEE®, BEHR PREMIUM PLUS ULTRA® or BEHR PREMIUM PLUS® Paints to extend open time and allow you to create unique decorative wall designs.

Sheen	Opacity	No.	Qt.	1 Gal.	Substrates	Features	Product Info
N/A	Trans	748	•	•	<ul style="list-style-type: none"> Drywall Plaster Wood 	<ul style="list-style-type: none"> Translucent Glaze Adds Depth and Dimension 	Vehicle: Acrylic VOC: < 350 g/L Coverage: 400 sq. ft./gal. Dry Time: 1 hr. touch; 4 hrs. recoat



BEHR PREMIUM PLUS WITH STYLE VENETIAN PLASTER

This product is a heavy-bodied, paste-like plaster finish for interior applications, providing a decorative, elegant, marble-like appearance that adds depth and dimension to walls and ceilings.

Product	Color	No.	Qt.	1 Gal.	Substrates	Features	Product Info
Venetian Base	Tint Base	77001		•	<ul style="list-style-type: none"> Plaster Drywall 	<ul style="list-style-type: none"> Adds Depth and Dimension Complements Any Decorative Style 	Sheen: 1-2 @ 85° Gloss: 1-1.5 @ 20°, 2-2.5 @ 60° Vehicle: 100% Acrylic VOC: < 50 g/L Coverage: 150 sq. ft./gal. Dry Time: 4 hrs. touch; 24 hrs. recoat
Clear Topcoat	Satin	77504	•				Sheen: 15-20 @ 85° Gloss: 1.5-2.0 @ 20°, 10-15 @ 60° Vehicle: 100% Acrylic VOC: < 100 g/L Coverage: 200 sq. ft./gal. Dry Time: 1 hr. touch; 24 hrs. recoat

Exterior Products

BEHR® and KILZ® Brands proudly present a full portfolio of exterior products. Each one offers superior quality, performance and durability while delivering protection and decreasing lifetime costs for commercial and residential properties and investments.



Exterior Multi-Purpose Primers



BEHR PREMIUM PLUS® INTERIOR/EXTERIOR MULTI-SURFACE PRIMER & SEALER

This interior/exterior 100% styrene-acrylic formula resists medium to heavy stains and covers old oil-based paint. This is also a low-odor, low-VOC formula with rust-inhibitive properties, and can be used on 'hot' stucco with pH levels up to 13.

Size & Product #	Substrates	Features	Product Info
Qt. 43604 1 Gal. 43601 5 Gal. 43605	<ul style="list-style-type: none"> Concrete/Tilt-Up Concrete Block/CMU Cement-Board Siding Brick Stucco Plaster Drywall/Gypsum Board 	<ul style="list-style-type: none"> Wood Plywood Ferrous Metals Non-Ferrous Metals Architectural Plastics Vinyl/PVC Fiberglass 	<ul style="list-style-type: none"> 100% Styrene Acrylic Low VOC/Low Odor Mildew-Resistant Finish High-Hide White with a Quick Recoat Time Blocks Medium to Heavy Stains Excellent Adhesion to Multiple Substrates Tintable for Dramatic Color Changes Corrosion and Rust Resistant to Ferrous and Non-Ferrous Metals
Vehicle: Styrene Acrylic VOC: < 50 g/L Coverage: 250-400 sq. ft./gal. Dry Time: 30 min. touch; 1 hr. recoat			



KILZ® PREMIUM INTERIOR/EXTERIOR PRIMER, SEALER & STAIN BLOCKER

This is an interior/exterior superior-quality, high-hide, water-based stain blocker offering GREENGUARD® Gold certification and very low odor. It provides excellent adhesion and a mildew-resistant coating.

Size & Product #	Substrates	Features	Product Info
Qt. MC13902 1 Gal. MC13941 5 Gal. MC13000	<ul style="list-style-type: none"> Concrete Concrete Block/CMU Cement-Board Siding Brick Stucco Plaster Drywall/Gypsum Board 	<ul style="list-style-type: none"> Wood Plywood Non-Ferrous Metals Architectural Plastics Vinyl/PVC Fiberglass 	<ul style="list-style-type: none"> High Performance Sealer and Stain Blocker Sticks to Glossy Surfaces High-Hide White Quick Recoat Time Low Odor, GREENGUARD Gold Certified Zero VOC Tintable
Vehicle: Acrylic Polymer VOC: < 5 g/L Coverage: 300-400 sq. ft./ gal. Dry Time: 30 min. touch; 1 hr. recoat			



KILZ 2® LATEX INTERIOR/EXTERIOR PRIMER, SEALER & STAIN BLOCKER

This is a fast-drying, interior/exterior water-based, multipurpose primer, sealer and stain blocker for vertical surfaces, which may be topcoated with latex or oil-based paint.

Size & Product #	Substrates	Features	Product Info
Qt. MC20902 1 Gal. MC20941 2 Gal. MC20005 5 Gal. MC20000	<ul style="list-style-type: none"> Concrete Concrete Block/CMU Cement-Board Siding Brick Stucco Paneling 	<ul style="list-style-type: none"> Plaster Drywall/Gypsum Board Wood Plywood Non-Ferrous Metals Architectural Plastics 	<ul style="list-style-type: none"> 100% Acrylic • Low VOC • Mild Odor Resists Stains, Moisture and Wear Exceptional Durability Great for Galvanized Metal
KILZ 2 Latex Gray 1 Gal. MC22941	KILZ 2 Gray (22941) <ul style="list-style-type: none"> Use Less Coats To Help Achieve More Accurate Colors Use Under Dark, Rich Colors Enhanced Hide and Coverage 		Vehicle: Acrylic Polymer VOC: < 50 g/L Coverage: 300-400 sq. ft./ gal. Dry Time: 30 min. touch; 1 hr. recoat

GREENGUARD is a registered trademark of UL LLC.



KILZ COMPLETE® INTERIOR/EXTERIOR PRIMER, SEALER & STAIN BLOCKER

This fast-dry, interior/exterior oil-based primer blocks severe stains and odors while penetrating and sealing porous surfaces.

Size & Product #	Substrates	Features	Product Info
Lower VOC Version (350 g/L) 1 Gal. L101201 5 Gal. L101205A	<ul style="list-style-type: none"> Concrete Concrete Block/CMU Cement-Board Siding Brick Stucco Drywall/Gypsum Board Wallpaper 	<ul style="list-style-type: none"> Plaster Wood Plywood Ferrous Metals 	<ul style="list-style-type: none"> Mildew-Resistant Coating Blocks Heavy Stains to Prevent Bleed-Through Exceptional Durability Blocks Severe Fire and Smoke Damage Blocks Tannin Bleed from Cedar, Redwood and Other Wood Stains Seals Persistent Smoke, Pet and Food Odors Suitable for Ferrous Metals Like Cast Iron, Wrought Iron and Steel
Regular VOC Version (450 g/L) Aero. L101348 Qt. L101304 1 Gal. L101301 5 Gal. L101305			Vehicle: Alkyd VOC: 450 g/L Coverage: 300-400 sq. ft./gal. Dry Time: 30 min. touch; 1 hr. recoat



KILZ KLEAR® INT/EXT MULTI-SURFACE CLEAR SEALER & BINDER

This is a high-performance interior/exterior multi-surface clear sealer offering a tough, flexible and breathable film. It bonds and seals porous and chalky surfaces, promotes better coverage on same-color paint projects, and can be used on 'hot' stucco with pH levels up to 12.5.

Size & Product #	Substrates	Features	Product Info
1 Gal. L220101 5 Gal. L220105	<ul style="list-style-type: none"> Concrete/Tilt-Up Concrete Block/CMU Cement-Board Siding Brick Stucco Plaster Drywall/Gypsum Board Wood 	<ul style="list-style-type: none"> Plywood Ferrous Metals Non-Ferrous Metals Architectural Plastics Plastics Vinyl/PVC Fiberglass 	<ul style="list-style-type: none"> Effective for Same-Color Painting Bonds to Chalky Surfaces with Little Change to Color Alkali-Resistant Primer and Sealer 100% Acrylic Low VOC Mild Odor Resists Stains, Moisture and Wear Exceptional Durability Great for Galvanized Metal
Vehicle: Styrene Acrylic VOC: < 100 g/L Coverage: 300-400 sq. ft./gal. Dry Time: 30 min. touch; 1 hr. recoat			

Exterior Special-Function Primers



BEHR PREMIUM® CONCRETE & MASONRY BONDING PRIMER

This interior/exterior high-performance, ready-to-use, water-based epoxy pretreatment is designed to promote adhesion between the surface and topcoat. Proper application results in excellent resistance to water, alkali and efflorescence.

Size & Product #	Substrates	Features	Product Info
1 Gal. 88001	<ul style="list-style-type: none"> Concrete Concrete Block/CMU Cement-Board Siding 	<ul style="list-style-type: none"> Brick Stucco Plaster 	<ul style="list-style-type: none"> Horizontal Surfaces Prevents Peeling of Topcoat Easy to Apply Promotes a Uniform Topcoat Finish
Vehicle: Epoxy/Acrylic VOC: < 100 g/L Coverage: 350-500 sq. ft./gal. Dry Time: 2 hrs. touch; 4 hrs. recoat			



KILZ® ADHESION INTERIOR/EXTERIOR BONDING PRIMER & SEALER

A water-based, modified-acrylic primer specifically formulated to bond to a variety of tough-to-paint surfaces.

Size & Product #	Substrates			Features	Product Info	
Qt. L211104 1 Gal. L211101	<ul style="list-style-type: none"> Concrete Concrete Block/CMU Cement-Board Siding Brick Stucco Plaster 	<ul style="list-style-type: none"> Drywall/ Gypsum Board Wood Plywood Wood Composites Ferrous Metals 	<ul style="list-style-type: none"> Non-Ferrous Metals Architectural Plastics Vinyl/PVC Fiberglass Chalky Surfaces Glazed Tile 	<ul style="list-style-type: none"> Glass Paneling and Laminates Kynar® Anodized Aluminum Factory Finishes 	<ul style="list-style-type: none"> Bonds to Hard-to-Adhere Surfaces Superior Adhesion for Topcoat on Tough-to-Paint Surfaces Interior/Exterior Mildew-Resistant Finish Resists Stains, Moisture and Wear Exceptional Durability 	Vehicle: Styrenated-Acrylic Polymer VOC: < 100 g/L Coverage: 300-400 sq. ft./gal. Dry Time: 30 min. touch; 1 hr. recoat



BEHR PRO™ BLOCK FILLER PRIMER

An interior/exterior latex primer designed for above-grade use on concrete block, cinder block, and poured or precast concrete. It's formulated to fill and seal porous masonry surfaces, reduce pinholing, and help produce a smooth and even topcoat.

Size & Product #	Substrates		Features	Product Info
5 Gal. PR5005	<ul style="list-style-type: none"> Concrete Concrete Block/CMU Cement-Board Siding 	<ul style="list-style-type: none"> Brick Stucco Plaster 	<ul style="list-style-type: none"> Vertical/Horizontal Surfaces Prevents Peeling of Topcoat Meets Federal Standard TT-C-555B Promotes a Uniform Topcoat Finish 	Vehicle: Acrylic Copolymer VOC: < 50 g/L Coverage: 75-150 sq. ft./gal. Dry Time: 1 hr. touch; 2 hrs. recoat

Exterior

Wood Cleaners & Removers



BEHR PREMIUM® ALL-IN-ONE WOOD CLEANER

Specifically formulated to clean and brighten wood surfaces as well as remove mildew stains. This unique product will also remove tannin bleed, red-clay stains, and rust stains on wood and masonry, and clean vinyl/aluminum siding, composite decks, and more.

Size & Product #	Substrates	Features	Product Info
1 Gal. 6301N	<ul style="list-style-type: none"> Exterior Wood and Composites 	<ul style="list-style-type: none"> Removes Tough Stains Non-Damaging to Wood Surfaces 	Vehicle: Oxalic Acid VOC: < 1 wt % Coverage: 200 sq. ft./gal.



BEHR PREMIUM WOOD STAIN & FINISH STRIPPER

This effective product is specifically formulated to remove existing oil and latex coatings. It strips away sealers, waterproofers and 100% acrylic stains and finishes.

Size & Product #	Substrates	Features	Product Info
1 Gal. 6401N	<ul style="list-style-type: none"> Exterior Latex and Oil-Based Coatings Over Wood 	<ul style="list-style-type: none"> Removes Sealers Removes Waterproofers Removes 100% Acrylic Stains 	Vehicle: Sodium Hydroxide VOC: < 4.1 wt % Coverage: 50-150 sq. ft./gal.

Kynar® is a registered trademark of Arkema Inc. ©2014 Arkema Inc. All rights reserved.

Exterior

Wall & Trim Paints



BEHR MARQUEE® EXTERIOR PAINT

MARQUEE

This is our most advanced stain-blocking paint-and-primer-in-one product that delivers remarkable dirt and fade resistance for your exterior. Your home will look freshly painted longer, even under the most challenging weather conditions.

Features

- Exceptional Resistance to Dirt and Fading
- Excellent Hide in Fewer Coats
- Advanced Technology for Longer-Lasting Color
- Resists Rain Shortly After Application
- Low Temperature Application
- Antimicrobial, Mildew-Resistant Finish
- Low VOC
- 100% Acrylic

Substrates

Properly prepared, primed or previously painted:

- Concrete
- Concrete Block/CMU
- Cement-Board Siding
- Brick
- Stucco
- Wood
- Plywood
- Ferrous Metals
- Non-Ferrous Metals

Sheen	Tint Base	No.	Qt.	1 Gal.	5 Gal.	Product Info
Flat	ULTRA PURE WHITE®	4450		●	●	Sheen: 0-6 @ 85° Gloss: 0-6 @ 60° Vehicle: 100% Acrylic Latex VOC: < 50 g/L Coverage: 250-400 sq. ft./gal. Dry Time: 1 hr. touch; 2 hrs. recoat
	Medium	4454		●	●	
	Deep	4453		●	●	
Satin	ULTRA PURE WHITE	9450		●	●	Sheen: > 35 @ 85° Gloss: 15-25 @ 60° Vehicle: 100% Acrylic Latex VOC: < 50 g/L Coverage: 250-400 sq. ft./gal. Dry Time: 1 hr. touch; 2 hrs. recoat
	Medium	9454		●	●	
	Deep	9453		●	●	
Semi-Gloss	ULTRA PURE WHITE	5450	●	●	●	Gloss: 45-55 @ 60° Vehicle: 100% Acrylic Latex VOC: < 50 g/L Coverage: 250-400 sq. ft./gal. Dry Time: 1 hr. touch; 2 hrs. recoat
	Medium	5454	●	●	●	
	Deep	5453	●	●	●	

BEHR PREMIUM PLUS ULTRA® EXTERIOR PAINT



This 100% acrylic stain-blocking paint and primer in one is the perfect choice for all weather climates, even in temperatures as low as 35° F. Its extra-protective shell with NANOGUARD® Technology resists damage from sunlight, moisture, stains, and dirt. Provides excellent durability and hide in fewer coats.

Features

- Low VOC
- 100% Acrylic
- Enhanced Mildew-Resistant Finish
- Low Temperature Application
- Stain and Dirt Resistant

Substrates

Properly prepared, primed or previously painted:

- Concrete
- Concrete Block/CMU
- Cement-Board Siding
- Brick
- Stucco
- Wood
- Plywood
- Ferrous Metals
- Non-Ferrous Metals

Sheen	Tint Base	No.	Qt.	1 Gal.	5 Gal.	Product Info
Flat	ULTRA PURE WHITE®	4850	●	●	●	Sheen: 0-6 @ 85° Gloss: 0-6 @ 60° Vehicle: 100% Acrylic Latex < 50 g/L VOC: 250-400 sq. ft./gal. Coverage: 2 hrs. touch; Dry Time: 4 hrs. recoat
	Medium	4854	●	●	●	
	Deep	4853	●	●	●	
Satin	ULTRA PURE WHITE	9850	●	●	●	Sheen: > 35 @ 85° Gloss: 15-25 @ 60° Vehicle: 100% Acrylic Latex < 50 g/L VOC: 250-400 sq. ft./gal. Coverage: 2 hrs. touch; Dry Time: 4 hrs. recoat
	Medium	9854	●	●	●	
	Deep	9853	●	●	●	
Semi-Gloss	ULTRA PURE WHITE	5850	●	●	●	Gloss: 45-55 @ 60° Vehicle: 100% Acrylic Latex < 50 g/L VOC: 250-400 sq. ft./gal. Coverage: 2 hrs. touch; Dry Time: 4 hrs. recoat
	Medium	5854	●	●	●	
	Deep	5853	●	●	●	

BEHR PREMIUM PLUS® EXTERIOR PAINT



This 100% acrylic paint and primer in one provides a mildew-resistant finish and is formulated to withstand wear. It resists moisture, fading and stains, and provides exceptional durability and hide.

Features

- Excellent Touch-Up
- Minimizes Surface Imperfections
- All-Climate Protection
- Excellent Hide
- Low VOC
- 100% Acrylic
- Mildew-Resistant Finish
- Enhanced Adhesion

Substrates

Properly prepared, primed or previously painted:

- Concrete
- Concrete Block/CMU
- Cement-Board Siding
- Brick
- Stucco
- Wood
- Plywood
- Ferrous Metals
- Non-Ferrous Metals

Sheen	Tint Base	No.	Qt.	1 Gal.	5 Gal.	Product Info
Flat	ULTRA PURE WHITE®	4050	●	●	●	Sheen: 0-5 @ 85° Gloss: 0-5 @ 60° Vehicle: 100% Acrylic Latex < 50 g/L VOC: 250-400 sq. ft./gal. Dry Time: 1 hr. touch; 2 hrs. recoat
	Medium	4400	●	●	●	
	Deep	4300	●	●	●	
Satin	ULTRA PURE WHITE	9050	●	●	●	Sheen: > 35 @ 85° Gloss: 15-25 @ 60° Vehicle: 100% Acrylic Latex < 50 g/L VOC: 250-400 sq. ft./gal. Dry Time: 1 hr. touch; 2 hrs. recoat
	Medium	9400	●	●	●	
	Deep	9340	●	●	●	
Semi-Gloss	ULTRA PURE WHITE	5050	●	●	●	Gloss: 45-55 @ 60° Vehicle: 100% Acrylic Latex < 50 g/L VOC: 250-400 sq. ft./gal. Dry Time: 1 hr. touch; 2 hrs. recoat
	Medium	5400	●	●	●	
	Deep	5340	●	●	●	
Hi-Gloss	ULTRA PURE WHITE	8050	●	●	●	Gloss: 45+ @ 20°, 75+ @ 60° Vehicle: 100% Acrylic Latex < 150 g/L VOC: 250-400 sq. ft./gal. Dry Time: 1 hr. touch; 2 hrs. recoat
	Medium	8400	●	●	●	
	Deep	8300	●	●	●	
	Red	8610	●	●	●	
	Black	8620	●	●	●	
	ULTRA PURE WHITE	28050	●	●	●	Gloss: 45+ @ 20°, 75+ @ 60° Vehicle: 100% Acrylic Latex < 50 g/L VOC: 250-400 sq. ft./gal. Dry Time: 1 hr. touch; 2-4 hrs. recoat
	Medium	28400	●	●	●	
	Deep	28300	●	●	●	
Red	28610	●	●	●		
Black	28620	●	●	●		

BEHR PRO™ e600 EXTERIOR PAINT



This paint is specifically designed to meet the demanding expectations of professional painters. Developed for optimal sprayability.

Features

- 100% Acrylic
- High Hide and Uniform Finish
- Mildew-Resistant Coating
- Low Temperature Cure

Substrates

Properly prepared, primed or previously painted:

- Concrete/Concrete Tilt-Up
- Concrete Block/CMU
- Cement-Board Siding
- Brick
- Stucco
- Wood
- Plywood
- Vinyl Siding
- Ferrous Metals
- Non-Ferrous Metals

Sheen	Tint Base	No.	1 Gal.	5 Gal.	Product Info
Flat	White	PR610	●	●	Sheen: 0-5 @ 85° Gloss: 0-5 @ 60° Vehicle: 100% Acrylic Latex VOC: < 50 g/L Coverage: 250-400 sq. ft./gal. Dry Time: 2 hrs. touch; 4 hrs. recoat
	Medium	PR614	●	●	
	Deep	PR613	●	●	
Satin	White	PR640	●	●	Sheen: > 35 @ 85° Gloss: 15-25 @ 60° Vehicle: 100% Acrylic Latex VOC: < 50 g/L Coverage: 250-400 sq. ft./gal. Dry Time: 2 hrs. touch; 4 hrs. recoat
	Medium	PR644	●	●	
	Deep	PR643	●	●	
Semi-Gloss	White	PR670	●	●	Gloss: 35-45 @ 60° Vehicle: 100% Acrylic Latex VOC: < 50 g/L Coverage: 250-400 sq. ft./gal. Dry Time: 2 hrs. touch; 4 hrs. recoat
	Medium	PR674	●	●	
	Deep	PR673	●	●	



BEHR® EXTERIOR ACRYLIC TEXTURED COATING

Exterior textured acrylic flat finish specially formulated to resist efflorescence and alkali burn. Medium texture helps hide surface defects while offering excellent adhesion, durability and coverage. Non-yellowing, mildew-resistant film.

Sheen	Color	No.	5 Gal.	Substrates	Features	Product Info
Flat	White	4200	●	<ul style="list-style-type: none"> • Masonry • Stucco • Cement • Cinder Block • Brick • Poured Concrete • CMU • Cementitious Board 	<ul style="list-style-type: none"> • Excellent Coverage • Minimizes Surface Defects • Excellent Adhesion • Outstanding Durability • Easy to Apply • Tintable 	<ul style="list-style-type: none"> • Dries Fast • Resists Sagging • Non-Yellowing • Excellent Weathering Properties • Mildew-Resistant Film
						Sheen: 0-5.0 @ 60° Vehicle: Acrylic Latex VOC: < 100 g/L Coverage: 80-100 sq. ft./gal. Dry Time: 2 hrs. touch; 4 hrs. recoat



BEHR PREMIUM® EXTERIOR MULTI-SURFACE FLAT PAINT

This 100% acrylic latex, traditional matte-finish paint has exceptional airless spray properties for a uniform sheen. Ideal for commercial and residential properties, it is specially formulated to minimize surface imperfections and provide a mildew-resistant finish.

Size & Product #	Substrates	Features	Product Info
5 Gal. 4100	<ul style="list-style-type: none"> • Concrete/Concrete Tilt-Up • Concrete Block/CMU • Cement-Board Siding • Brick 	<ul style="list-style-type: none"> • Stucco • Wood • Plywood • Vinyl Siding • Ferrous Metals • Non-Ferrous Metals 	<ul style="list-style-type: none"> • Great Airless Spray Properties • Uniform Sheen • Matte Finish • Ideal for Commercial and Residential Properties
			Sheen: < 5 @ 85° Gloss: < 5 @ 60° Vehicle: 100% Acrylic VOC: < 50 g/L Coverage: 250-400 sq. ft./gal. Dry Time: 2 hrs. touch; 4 hrs. recoat



BEHR® MASONRY, STUCCO & BRICK PAINT

A high-quality acrylic latex paint with excellent hiding properties. This water-based interior/exterior self-priming paint creates a mildew-resistant finish and provides excellent adhesion and water repellency on smooth, rough and textured vertical surfaces.

Sheen	Tint Base	No.	1 Gal.	5 Gal.	Substrates	Features	Product Info
Flat	White	270	●	●	<ul style="list-style-type: none"> • Concrete • Concrete Block/CMU 	<ul style="list-style-type: none"> • Cement-Board Siding • Brick • Stucco 	<ul style="list-style-type: none"> • Self-Priming • Acrylic Latex • Alkali Resistant • Mildew-Resistant Finish • Excellent Coverage
	Deep	272	●	●			
Satin	White	280	●	●			Sheen: > 35 @ 85° Gloss: 15-25 @ 60° Vehicle: Acrylic Latex VOC: < 50 g/L Coverage: 250-400 sq. ft./gal. Dry Time: 1 hr. touch; 2-4 hrs. recoat
	Deep	282	●	●			



BEHR PREMIUM ELASTOMERIC MASONRY, STUCCO & BRICK PAINT

BEHR PREMIUM Elastomeric Masonry, Stucco & Brick Paint is a flexible, high-build coating designed to expand and contract, bridging hairline cracks in exterior vertical masonry surfaces. This waterproofing paint is extremely durable and is mildew and dirt resistant. It has superior elasticity and elongation properties, stretching up to 600%.

Sheen	Tint Base	No.	1 Gal.	5 Gal.	Substrates	Features	Product Info
Flat	White	68	●	●	<ul style="list-style-type: none"> • Concrete • Concrete Block/CMU 	<ul style="list-style-type: none"> • Cement-Board Siding • Brick • Stucco 	<ul style="list-style-type: none"> • Self-Priming • Acrylic Latex • Alkali Resistant • Mildew-Resistant Finish • Excellent Coverage
	Deep	67	●	●			
							Sheen: 0-6 @ 85° Gloss: 0-6 @ 60° Vehicle: 100% Acrylic VOC: < 50 g/L Coverage: 75-125 sq. ft./gal. Dry Time: 4-6 hrs. touch; 24 hrs. recoat



BEHR BARN & FENCE PAINT

An advanced exterior paint combining the best features of oil and latex for superior color retention, adhesion, penetration and durability. Dry film will not harm livestock.

Sheen	Color	No.	1 Gal.	5 Gal.	Substrates	Features	Product Info
Flat	White	35	●	●	<ul style="list-style-type: none"> • Smooth or Rough-Sawn Vertical Wood Surfaces • Plywood 	<ul style="list-style-type: none"> • Shingles • Shakes • Fences • Siding • Laminates 	<ul style="list-style-type: none"> • Durable Oil-Latex Formula • Lead-Free • Self-Priming • Ready to Use • Mildew-Resistant Finish • Easy Water Cleanup
	Red	25	●	●			
							Sheen: 10-20 @ 85° Gloss: < 10 @ 60° Vehicle: Oil Latex VOC: < 100 g/L Coverage: 200-500 sq. ft./gal. Dry Time: 2-3 hrs. touch; 6-8 hrs. recoat



BEHR® OIL-BASE SEMI-GLOSS ENAMEL

This paint formula provides a professional-quality, mildew-resistant finish, and will help protect both interior and exterior surfaces from scuffs, rust and household chemicals.

Sheen	Tint Base	No.	Qt.	1 Gal.	5 Gal.	Substrates	Features	Product Info	
Semi-Gloss	White	3800	●	●	●	<ul style="list-style-type: none"> Concrete Concrete Block/CMU Cement-Board Siding Brick 	<ul style="list-style-type: none"> Stucco Plaster Wood Plywood Non-Ferrous Metals 	<ul style="list-style-type: none"> Excellent Flow and Leveling Resists Household Chemicals Easy Stain Removal 	Gloss: 45-55 @ 60° after 14-day cure Vehicle: Alkyd VOC: < 380 g/L Coverage: 350-550 sq. ft./gal. Dry Time: 4-5 hrs. touch; 24 hrs. recoat
	Deep	3830	●	●	●				



BEHR ALKYD SEMI-GLOSS ENAMEL

This interior/exterior product provides the performance and durability of a traditional oil-based paint with the ease of use and convenience of a water-based paint. This professional-quality finish offers excellent flow and leveling with easy water cleanup.

Sheen	Tint Base	No.	1 Gal.	Substrates	Features	Product Info	
Semi-Gloss	White	3900	●	<ul style="list-style-type: none"> Concrete Concrete Block/CMU Cement-Board Siding Brick Stucco 	<ul style="list-style-type: none"> Plaster Wood Plywood Ferrous Metals Non-Ferrous Metals 	<ul style="list-style-type: none"> Excellent Flow and Leveling Less Odor than Oil-Based Paint Easy Water Cleanup Resists Household Chemicals Durable, Hard Finish Easy Stain Removal Mildew-Resistant Finish 	Gloss: 45-60 @ 60° after 14-day cure Vehicle: Alkyd VOC: < 50 g/L Coverage: 350-550 sq. ft./gal. Dry Time: 2-4 hrs. touch; 4-8 hrs. recoat
	Deep	3930	●				



BEHR PREMIUM® INTERIOR/EXTERIOR DIRECT-TO-METAL PAINT

This 100% acrylic paint provides excellent corrosion and flash rust resistance. Engineered for excellent adhesion to a variety of properly prepared or primed residential and light-commercial metal surfaces.

Sheen	Tint Base/Pre-Mix	No.	1 Gal.	5 Gal.	Substrates	Features	Product Info
Semi-Gloss	White	3200	●	●	<ul style="list-style-type: none"> Ferrous Metals Non-Ferrous Metals Wood 	<ul style="list-style-type: none"> Excellent Adhesion Durable, Hard Finish Corrosion Resistant 	Gloss: 45-55 @ 60° Vehicle: Styrene Acrylic VOC: < 100 g/L Coverage: 350-400 sq. ft./gal. Dry Time: 1 hr. touch; 3 hrs. recoat
	Deep	3230	●	●			
	Red	3210	●				
	Black	3220	●	●			
	Yellow	3214	●				
Gloss	White	8200	●	●			Gloss: > 70 @ 60° Vehicle: Styrene Acrylic VOC: < 100 g/L Coverage: 350-400 sq. ft./gal. Dry Time: 1 hr. touch; 3 hrs. recoat
	Deep	8230	●	●			
	Red	8210	●				
	Black	8220	●	●			
	Yellow	8214	●	●			



BEHR PREMIUM EXTERIOR HIGH BUILD COATING

Formulated as a self-priming concrete and masonry coating, this flexible and long-lasting waterproof, smooth coating withstands wind-driven rain up to 98 mph and may be applied to 'hot' masonry surfaces with pH levels up to 13.

Sheen	Tint Base	No.	5 Gal.	Substrates	Features	Product Info
Flat	White	4700	●	<ul style="list-style-type: none"> Concrete Concrete Block/CMU Cement-Board Siding Brick Stucco 	<ul style="list-style-type: none"> 100% Acrylic Withstands 98 MPH Wind-Driven Rain Alkali Resistant Bridges Hairline Cracks Breathable Finish 	Sheen: < 5 @ 85° Vehicle: 100% Acrylic VOC: < 50 g/L Coverage: 75-125 sq. ft./gal. Dry Time: 1 hr. touch; 2-4 hrs. recoat

Exterior

Wood Stains & Finishes

BEHR PREMIUM® WEATHERPROOFING ALL-IN-ONE WOOD STAINS & FINISHES



These 100% acrylic stains and finishes provide a mildew-resistant finish and are formulated to withstand wear. They resist moisture, fading and stains, and provide exceptional durability and hide.

Features

- Advanced 100% Acrylic
- Enhanced UV Protection
- Mildew-Resistant Finish
- Easy Water Cleanup

Substrates

- Properly prepared or previously painted:
- Wood
 - Wood Composites (Solid-Color Stain Only)

Opacity	Tint Base/Pre-Mix	No.	Qt.	1 Gal.	5 Gal.	Product Info
Solid Color	White	5011		●	●	Vehicle: Advanced 100% Acrylic VOC: < 100 g/L Coverage: 200-400 sq. ft./gal. Dry Time: 1-2 hrs. recoat
	Deep	5013		●	●	
	Cedar Naturaltone	50533		●		
Semi-Transparent	Tint Base	5077		●	●	Vehicle: Advanced 100% Acrylic VOC: < 100 g/L Coverage: 250-300 sq. ft./gal. Dry Time: 1-2 hrs. recoat
	Cedar Naturaltone	5533		●		
	Redwood	5330		●		
Transparent	Natural	500	●	●	●	Vehicle: Advanced 100% Acrylic VOC: < 275 g/L Coverage: 300-350 sq. ft./gal. Dry Time: 1-2 hrs. recoat
	Cedar Naturaltone	501	●	●	●	
	Redwood	502	●	●	●	

BEHR® WATERPROOFING WOOD STAINS & FINISHES



These 100% acrylic formulas seal out water and block the sun's harmful UV rays on decks, fences and siding.

Features

- 100% Acrylic
- Mildew-Resistant Finish
- UV Protection
- Resists Cracking, Peeling and Blistering

Substrates

- Properly prepared or previously painted:
- Wood
 - Wood Composites (Solid-Color Stain Only)

Opacity	Tint Base/Pre-Mix	No.	1 Gal.	5 Gal.	Product Info
Solid Color	White	211	●	●	Vehicle: 100% Acrylic VOC: < 100 g/L Coverage: 200-400 sq. ft./gal. Dry Time: 1-2 hrs. recoat
	Deep	213	●	●	
	Cedar Naturaltone	2553	●		
	Redwood	2330	●		
	Cape Cod Gray	2365	●		
Semi-Transparent	Tint Base	3077	●	●	Vehicle: 100% Acrylic VOC: < 100 g/L Coverage: 250-300 sq. ft./gal. Dry Time: 1-2 hrs. recoat
	Cedar Naturaltone	3533	●		
	Redwood	3330	●		
	Cape Cod Gray	3365	●		
Transparent	Natural	400	●	●	Vehicle: 100% Acrylic VOC: < 275 g/L Coverage: 300-350 sq. ft./gal. Dry Time: 1-2 hrs. recoat
	Cedar Naturaltone	401	●	●	
	Redwood	402	●	●	



BEHR® SOLID COLOR HOUSE & FENCE WOOD STAIN

An exterior stain that combines the best features of oil and latex, creating a durable film that resists cracking and peeling on your home's vertical surfaces. It's available in more than 1,600 custom and computer-matched colors.

Opacity	Tint Base	No.	1 Gal.	5 Gal.	Substrates	Features	Product Info
Solid Color	White	11	●	●	• Wood • Plywood • Wood Composites	• Self-Priming • Resists Moisture, Cracking and Blistering • Mildew-Resistant Finish	Vehicle: Oil Latex VOC: < 100 g/L Coverage: 200-400 sq. ft./gal. Dry Time: 2-3 hrs. touch; 6-8 hrs. recoat
	Deep	30	●	●			



BEHR PREMIUM® TRANSPARENT PENETRATING OIL WOOD FINISH

This premium oil-based product penetrates to provide protection from water on decks and siding. The available colors enhance the natural color of the wood.

Sheen	Pre-Mix	No.	1 Gal.	5 Gal.	Substrates	Features	Product Info
Transparent	Clear	4000	●	●	• Wood	• Penetrating Oil Formula • Durable, Water-Repellent Finish • Enhances Natural Wood Color	Vehicle: Long-Oil Alkyd VOC: < 275 g/L Coverage: 250-300 sq. ft./gal. Dry Time: 2-4 hrs. touch; 6-8 hrs. recoat
	Cedar Naturaltone	4001	●	●			
	Redwood	4002	●	●			
	Chocolate	4029	●	●			



BEHR OIL-LATEX REDWOOD STAIN

This unique formula produces a deep redwood-tone stain that protects wood from water and UV rays with a penetrating oil-latex formula.

Size & Product #	Substrates	Features	Product Info
1 Gal. 901	• Wood • Pressure-Treated Lumber	• Penetrates Wood Surfaces • Resist Cracking, Flaking and Peeling	Vehicle: Oil-Latex VOC: < 100 g/L Coverage: 200-400 sq. ft./gal. Dry Time: 1 hr. touch; 4 hrs. recoat

Exterior

Concrete Floor Paints & Finishes



BEHR PREMIUM PORCH & PATIO FLOOR PAINT

Get a durable, long-lasting finish with this 100% acrylic-latex, mildew-resistant paint film. This finish is ideal for both interior and exterior applications. It resists scuffing, fading, cracking and peeling. Use on concrete and wood surfaces.

Sheen	Tint Base/Pre-Mix	No.	1 Gal.	5 Gal.	Substrates	Features	Product Info
Low Lustre	White	6050	●		• Wood • Concrete • Composite	• Interior/Exterior • Resists Scuffing, Fading, Cracking and Peeling • Mildew-Resistant Finish • 100% Acrylic Latex	Sheen: 5-15 @ 85° Gloss: 5-15 @ 60° Vehicle: 100% Acrylic Latex VOC: < 50 g/L Coverage: 200-400 sq. ft./gal. Dry Time: 1 hr. touch; 4-6 hrs. recoat
	Deep	6300	●				
	Slate Gray	6695	●	●			
Gloss	White	6705	●				Gloss: 65+ @ 60° Vehicle: 100% Acrylic Latex VOC: < 100 g/L Coverage: 200-400 sq. ft./gal. Dry Time: 1 hr. touch; 4-6 hrs. recoat
	Deep	6730	●				
	Slate Gray	6795	●	●			



BEHR PREMIUM® 1-PART EPOXY ACRYLIC CONCRETE & GARAGE FLOOR PAINT

This interior/exterior high-performance, ready-to-use, water-based product provides a highly resistant finish against most chemicals, automotive fluids, hot-tire pick-up, marring, scuffing, fading, cracking, peeling and blistering.

Sheen	Color	No.	1 Gal.	5 Gal.	Substrates	Features	Product Info
Satin	White	900	●	●	<ul style="list-style-type: none"> • Porous Concrete • Masonry 	<ul style="list-style-type: none"> • Interior/Exterior • Easy, No-Mix Formula • Resists Chemicals and Hot-Tire Pick-Up • Slip-Resistant, Satin Finish 	Sheen: 40-60 @ 85° Gloss: 15-25 @ 60° Vehicle: Epoxy/Acrylic VOC: < 50 g/L Coverage: 300-500 sq. ft./gal. Dry Time: 1 hr. touch; 4-6 hrs. recoat
	Deep	930	●	●			
	Slate Gray	902	●	●			



BEHR PREMIUM GRANITE GRIP™ COATING

This interior/exterior product can fill hairline cracks and revive concrete surfaces while providing a durable, protective finish. It is ideal for horizontal surfaces such as walkways, patios, porches and pool decks.

Sheen	Color	No.	1 Gal.	5 Gal.	Substrates	Features	Product Info
Flat	Gray	650	●	●	<ul style="list-style-type: none"> • Porous Concrete • Masonry • Stone • Brick 	<ul style="list-style-type: none"> • Revives Concrete Surfaces • Durable, Protective Finish • Available in Custom Colors • Fills in Hairline Cracks • Resists Dirt, Grease and Household Stains 	Sheen: < 10 @ 85° Gloss: < 10 @ 60° Vehicle: Acrylic VOC: < 50 g/L Coverage: 40-60 sq. ft./gal. (2 coats) Dry Time: 1 hr. touch; 3-4 hrs. recoat
Flat	Tan	655	●	●			



BEHR PREMIUM CONCRETE STAINS

These durable, flat-finish, water-repellent, solid-color and semi-transparent stains are designed to help protect and enhance vertical and horizontal interior and exterior concrete surfaces.

Opacity	Tint Base	No.	1 Gal.	5 Gal.	Substrates	Features	Product Info
Solid Color	White	800	●	●	<ul style="list-style-type: none"> • Concrete • Brick • Masonry 	<ul style="list-style-type: none"> • Interior/Exterior • Siliconized 100% Acrylic • Resists Chemicals and Hot-Tire Pick-Up • Flat Finish 	Sheen: 5-10 @ 85° Vehicle: Siliconized 100% Acrylic VOC: < 100 g/L Coverage: 400-600 sq. ft./gal. Dry Time: 2 hrs. touch; 2-4 hrs. recoat
	Deep	830	●	●			
Semi-Transparent	Tint Base	850	●	●			



BEHR PREMIUM DECORATIVE CONCRETE DYE

A unique decorative finish that adds depth and warmth to your home by transforming ordinary concrete into a beautiful and luxurious floor resembling a natural, marble-stone finish.

Size & Product #	Substrates	Features	Product Info
Qt. 86304 1 Gal. 86301	<ul style="list-style-type: none"> • Concrete • Concrete Block/CMU • Brick 	<ul style="list-style-type: none"> • Interior/Exterior • Available in Single- and Custom-Color Combinations • Water Based • Acid-Free 	Vehicle: Acrylic VOC: < 120 g/L Coverage: 175-250 sq. ft./gal. Dry Time: 1-2 hrs touch; 24 hrs before applying required clear topcoat



BEHR PREMIUM DECKOVER® WOOD & CONCRETE COATING

Bring new life to old wood and concrete horizontal and vertical surfaces. This interior/exterior 100% acrylic formula conceals splinters and cracks up to 1/4" and creates a slip-resistant finish that also resists cracking and peeling. Available in 54 custom solid colors.

Finish	Tint Base	No.	1 Gal.	5 Gal.	Substrates	Features	Product Info
Smooth	Deep	5000	●	●	<ul style="list-style-type: none"> • Wood • Composite • Concrete 	<ul style="list-style-type: none"> • Resists Cracking and Peeling • Durable, Mildew-Resistant Finish • Waterproofing, Solid-Color Coating • Revives Wood and Composite Decks, Railings, Porches and Boat Docks • Great for Concrete Pool Decks, Patios and Sidewalks 	Sheen: 40-60 @ 85° Gloss: 15-25 @ 60° Vehicle: 100% Acrylic VOC: < 50 g/L Coverage: 75 sq. ft./gal. (2 coats) Dry Time: 4-6 hrs. recoat; 24-48 hrs. light foot traffic
Textured	Deep	5005	●	●			

Exterior

Clear Finishes



BEHR PREMIUM TRANSPARENT LOG HOME GLOSS FINISH

This durable, water-repellent, transparent gloss finish is designed to help protect and enhance vertical and horizontal exterior log-home surfaces.

Sheen	Tint Base	No.	1 Gal.	5 Gal.	Substrates	Features	Product Info
Gloss	Clear	15	●	●	<ul style="list-style-type: none"> • Wood 	<ul style="list-style-type: none"> • Durable and Flexible Coating • Easy Water Cleanup • UV Protection • Mildew-Resistant Finish 	Gloss: 80-100 @ 60° Vehicle: Alkyd/Acrylic Dispersion VOC: < 275 g/L Coverage: 200-400 sq. ft./gal. Dry Time: 8-12 hrs. touch; 24 hrs. recoat
	Cedar	16	●	●			



BEHR PREMIUM® TRANSPARENT WEATHERPROOFING ALL-IN-ONE WOOD FINISH

This 100% acrylic formula provides a mildew-resistant finish and is formulated to withstand wear. It resists moisture, fading and stains, and provides exceptional durability and hide.

Size & Product #	Substrates	Features	Product Info
Qt. 50004 1 Gal. 50001 5 Gal. 50005	<ul style="list-style-type: none"> • Wood 	<ul style="list-style-type: none"> • Penetrating Advanced 100% Acrylic • Enhanced UV Protection • Mildew-Resistant Finish • Easy Water Cleanup 	Vehicle: Advanced 100% Acrylic VOC: < 275 g/L Coverage: 300-350 sq. ft./gal. Dry Time: 1-2 hrs. recoat 24-48 hrs. light foot traffic 72 hrs. full cure



BEHR® TRANSPARENT WATERPROOFING WOOD FINISH

This transparent 100% acrylic formula seals out water and blocks the sun's harmful UV rays on decks, fences and siding.

Size & Product #	Substrates	Features	Product Info
1 Gal. 40001 5 Gal. 40005	<ul style="list-style-type: none"> • Wood 	<ul style="list-style-type: none"> • 100% Acrylic • Beautifies Wood • UV Protection • Mildew-Resistant Finish 	Sheen: N/A Vehicle: 100% Acrylic VOC: < 275 g/L Coverage: 300-350 sq. ft./gal. Dry Time: 1-2 hrs. recoat 24-48 hrs. light foot traffic 72 hrs. full cure



BEHR PREMIUM WET-LOOK SEALER

Protect and seal concrete and masonry surfaces with this non-yellowing, high-solids, acrylic-based masonry sealer. It's an ideal topcoat for concrete and pavers and provides a high-gloss, wet-look finish.

Size & Product #	Substrates	Features	Product Info
1 Gal. 98501 5 Gal. 98505	<ul style="list-style-type: none"> • Concrete • Unglazed Tile • Brick • Aggregate • Natural and Artificial Stone • Pavers 	<ul style="list-style-type: none"> • Non-Yellowing • Acrylic-Based • High-Gloss Finish 	Gloss: 55-70 @ 20° 80-90 @ 60° Vehicle: Acrylic VOC: < 100 g/L Coverage: 200-450 sq. ft./gal. Dry Time: 1 hr. touch; 4 hrs. recoat



BEHR PREMIUM LOW-LUSTRE SEALER

This sealer provides a low-gloss finish while sealing and protecting concrete and masonry. A non-yellowing, high-solids, acrylic-based masonry sealer, this product is an outstanding topcoat for concrete and pavers.

Size & Product #	Substrates	Features	Product Info
1 Gal. 98601	<ul style="list-style-type: none"> • Concrete • Unglazed Tile • Brick • Aggregate • Natural and Artificial Stone • Pavers 	<ul style="list-style-type: none"> • Non-Yellowing • Acrylic-Based • Low-Gloss Finish 	Gloss: 15-25 @ 60° Vehicle: Acrylic VOC: < 100 g/L Coverage: 200-450 sq. ft./gal. Dry Time: 1 hr. touch; 4 hrs. recoat

Exterior

Waterproofers



BEHR PREMIUM BASEMENT & MASONRY WATERPROOFER

This waterproofer is a durable, water-repellent, solid-color topcoat designed to help protect and enhance both exterior and interior vertical concrete surfaces.

Size & Product #	Substrates	Features	Product Info
1 Gal. 87501 5 Gal. 87505	<ul style="list-style-type: none"> • Concrete • Concrete Block/CMU • Cement-Board Siding • Brick • Stucco • Drywall/Gypsum Board 	<ul style="list-style-type: none"> • Withstands 12 PSI of Water Pressure • Mildew-Resistant Film • Smooth, Flat Finish • Withstands 98 MPH Wind-Driven Rain • 100% Styrene Acrylic • Spray and Roll Application • Perm Rating < 1.0 	Sheen: < 5 @ 85° Vehicle: 100% Styrene-Acrylic Latex VOC: < 100 g/L Coverage: 75-125 sq. ft./gal. Dry Time: 1 hr. touch; 4 hrs. recoat



BEHR PREMIUM CONCRETE & MASONRY PROTECTOR & WATERPROOFER

Formulated with water-based silicone technology, this product is designed to penetrate surfaces up to 1/2" to help protect against corrosion, spalling, efflorescence, and freeze-thaw damage.

Size & Product #	Substrates	Features	Product Info
1 Gal. 98001 5 Gal. 98005	<ul style="list-style-type: none"> • Concrete • Unglazed Tile • Brick • Aggregate • Pavers • Stucco 	<ul style="list-style-type: none"> • Silicone Formulated • Shields Against Salt Damage and Corrosion • Spalling Protection • Efflorescence Protection • Freeze-Thaw Damage Protection 	Vehicle: Silane/Siloxane VOC: < 120 g/L Coverage: 250 sq. ft./gal. Dry Time: 24-48 hrs. recoat

Exterior

Roof Paint



BEHR MULTI-SURFACE ROOF PAINT

This premium-quality, durable, 100% acrylic-latex flat paint film is mildew and algae resistant and will not discolor or yellow when exposed to typical high roof temperatures. It has excellent adhesion to various types of roofing materials and is tintable.

Opacity	Tint Base	No.	1 Gal.	5 Gal.	Substrates	Features	Product Info
Natural	White	65	●	●	<ul style="list-style-type: none"> • Concrete • Wood • Ferrous Metals • Non-Ferrous Metals 	<ul style="list-style-type: none"> • 100% Acrylic Latex • Resists Fading • Non-Yellowing • Mildew- and Algae-Resistant Finish 	Sheen: 0-5 @ 85° Gloss: 0-5 @ 60° Vehicle: 100% Acrylic VOC: < 50 g/L Coverage: 250-450 sq. ft./gal. Dry Time: 2 hrs. touch, 4 hrs. recoat
	Deep	66	●	●	<ul style="list-style-type: none"> • Unglazed Tile • Masonry Shingles • Urethane Foam • Asphalt Shingles 		

Product Specifications

PRODUCT CODE	PRODUCT DESCRIPTION	SCAQMD	CARB	OTC	LADCO	AIM	LEED® 2009*	LEED® V.4*	MPI®	MPI X-GREEN	GREEN-GUARD®	CHPS	NAHB/ICC NGBS
PRIMERS & SEALERS													
880	BEHR PREMIUM® Concrete & Masonry Bonding Primer	Yes	Yes	Yes	Yes	Yes	Yes	No	No	No	No	No	No
75	BEHR PREMIUM PLUS® Interior All-In-One Primer & Sealer	Yes	Yes	Yes	Yes	Yes	Yes	Yes	39, 50, 137, 149	50 X-Green	Yes	Yes	Yes
73	BEHR PREMIUM PLUS® Interior Drywall Primer & Sealer	Yes	Yes	Yes	Yes	Yes	Yes	Yes	50	No	Yes	Yes	Yes
436	BEHR PREMIUM PLUS® Int/Ext Multi-Surface Primer & Sealer	Yes	Yes	Yes	Yes	Yes	Yes	Yes	3, 6, 17, 107, 134, 137	3 X-Green 107 X-Green	Yes	Yes	Yes
PR50	BEHR PRO™ Block Filler Primer	Yes	Yes	Yes	Yes	Yes	Yes	No	4	No	No	No	No
PR40	BEHR PRO™ High Build Interior Primer	Yes	Yes	Yes	Yes	Yes	Yes	No	No	No	No	No	No
2000	KILZ 2® Latex Int/Ext Primer, Sealer & Stain Blocker	Yes	Yes	Yes	Yes	Yes	Yes	Yes	6, 17, 39, 50, 134, 137	No	Yes	Yes	Yes
L2111	KILZ® Adhesion Int/Ext Bonding Primer & Sealer	Yes	Yes	Yes	Yes	Yes	Yes	No	17	No	No	No	No
L1012	KILZ COMPLETE® Int/Ext Primer, Sealer & Stain Blocker	Yes	Yes	Yes	Yes	Yes	No	No	5, 45, 76, 136	No	No	No	No
L2201	KILZ KLEAR® Int/Ext Multi-Surface Clear Sealer & Binder	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	No	Yes	Yes	No
L2004	KILZ MAX® Clear Primer, Sealer & Stain Blocker	Yes	Yes	Yes	Yes	Yes	Yes	No	No	No	No	No	No
L2002	KILZ MAX® Interior Primer, Sealer & Stain Blocker	Yes	Yes	Yes	Yes	Yes	Yes	Yes	39, 137	No	Yes	Yes	No
1004	KILZ ODORLESS® Interior Primer, Sealer & Stain Blocker	No	No	No	No	Yes	No	No	45, 46, 223	No	No	No	No
1000	KILZ® Original Primer, Sealer & Stain Blocker	No	No	No	No	Yes	No	No	45, 46, 136	No	No	No	No
1300	KILZ® Premium, Int/Ext Primer, Sealer & Stain Blocker	Yes	Yes	Yes	Yes	Yes	Yes	Yes	6, 39	No	Yes	Yes	Yes
PX010	KILZ® PVA Interior Drywall Primer & Sealer	Yes	Yes	Yes	Yes	Yes	Yes	No	No	No	No	No	No
INTERIOR PAINT													
2450	BEHR MARQUEE® Interior Eggshell Enamel	Yes	Yes	Yes	Yes	Yes	Yes	Yes	52	52 X-Green	Yes	Yes	Yes
1450	BEHR MARQUEE® Interior Matte Enamel	Yes	Yes	Yes	Yes	Yes	Yes	Yes	138	138 X-Green	Yes	Yes	Yes
7450	BEHR MARQUEE® Interior Satin Enamel	Yes	Yes	Yes	Yes	Yes	Yes	Yes	43, 140	No	Yes	Yes	Yes
3450	BEHR MARQUEE® Interior Semi-Gloss Enamel	Yes	Yes	Yes	Yes	Yes	Yes	Yes	54	54 X-Green	Yes	Yes	Yes
558	BEHR PREMIUM PLUS® Interior Ceiling Paint	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	No	Yes	Yes	No
2050	BEHR PREMIUM PLUS® Interior Eggshell Enamel	Yes	Yes	Yes	Yes	Yes	Yes	Yes	44, 52	52 X-Green	Yes	Yes	Yes
1050	BEHR PREMIUM PLUS® Interior Flat Enamel	Yes	Yes	Yes	Yes	Yes	Yes	Yes	53, 143	53 X-Green	Yes	Yes	Yes
7050	BEHR PREMIUM PLUS® Interior Satin Enamel	Yes	Yes	Yes	Yes	Yes	Yes	Yes	43, 140, 146	43 X-Green	Yes	Yes	Yes
3050	BEHR PREMIUM PLUS® Interior Semi-Gloss Enamel	Yes	Yes	Yes	Yes	Yes	Yes	Yes	54, 147	54 X-Green	Yes	Yes	Yes
2750	BEHR PREMIUM PLUS ULTRA® Interior Eggshell Enamel	Yes	Yes	Yes	Yes	Yes	Yes	Yes	52	52 X-Green	Yes	Yes	Yes
1750	BEHR PREMIUM PLUS ULTRA® Interior Matte Enamel	Yes	Yes	Yes	Yes	Yes	Yes	Yes	53, 138	53 X-Green 138 X-Green	Yes	Yes	Yes
7750	BEHR PREMIUM PLUS ULTRA® Interior Satin Enamel	Yes	Yes	Yes	Yes	Yes	Yes	Yes	43	43 X-Green	Yes	Yes	Yes
3750	BEHR PREMIUM PLUS ULTRA® Interior Semi-Gloss Enamel	Yes	Yes	Yes	Yes	Yes	Yes	Yes	54	54 X-Green	Yes	Yes	Yes
5558	BEHR PREMIUM PLUS ULTRA® Interior Stain-Blocking Ceiling Paint	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	No	Yes	Yes	No
748	BEHR PREMIUM PLUS WITH STYLE® Faux Glaze	Yes	Yes	Yes	Yes	Yes	No	No	No	No	No	No	No
770/775	BEHR PREMIUM PLUS WITH STYLE® Venetian Plaster	Yes	Yes	Yes	Yes	Yes	Yes	No	No	No	No	No	No
PR890/891	BEHR PRO™ Dryfall Paint (Flat)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	118, 133	No	Yes	Yes	No
PR110	BEHR PRO™ i100 Interior Dead Flat Paint	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	No	Yes	Yes	No
PR130	BEHR PRO™ i100 Interior Eggshell Paint	Yes	Yes	Yes	Yes	Yes	Yes	Yes	44	No	Yes	Yes	No
PR170	BEHR PRO™ i100 Interior Semi-Gloss Paint	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	No	Yes	Yes	No
PR310	BEHR PRO™ i300 Interior Dead Flat Paint	Yes	Yes	Yes	Yes	Yes	Yes	Yes	53, 143	53 X-Green	Yes	Yes	Yes
PR330	BEHR PRO™ i300 Interior Eggshell Paint	Yes	Yes	Yes	Yes	Yes	Yes	Yes	44	44 X-Green	Yes	Yes	Yes
PR370	BEHR PRO™ i300 Interior Semi-Gloss Paint	Yes	Yes	Yes	Yes	Yes	Yes	Yes	54	No	Yes	Yes	Yes
6810	KILZ® Ceiling Paint	Yes	Yes	Yes	Yes	Yes	Yes	No	No	No	No	No	No
INTERIOR & EXTERIOR PAINT													
3900	BEHR® Alkyd Semi-Gloss Enamel	Yes	Yes	Yes	Yes	Yes	Yes	No	No	No	No	No	No
270	BEHR® Masonry, Stucco & Brick Paint (Flat)	Yes	Yes	Yes	Yes	Yes	Yes	No	10	No	No	No	No
280	BEHR® Masonry, Stucco & Brick Paint (Satin)	Yes	Yes	Yes	Yes	Yes	Yes	No	No	No	No	No	No
3800	BEHR® Oil-Base Semi-Gloss Enamel	No	No	No	No	Yes	No	No	47, 81	No	No	No	No
875	BEHR PREMIUM® Basement & Masonry Waterproofer	Yes	Yes	Yes	Yes	Yes	Yes	No	No	No	No	No	No
8200	BEHR PREMIUM® Int/Ext Direct-To-Metal Paint (Gloss)	Yes	Yes	Yes	Yes	Yes	Yes	No	119, 154	No	No	No	No
3200	BEHR PREMIUM® Int/Ext Direct-To-Metal Paint (Semi-Gloss)	Yes	Yes	Yes	Yes	Yes	Yes	No	153	No	No	No	No
8050	BEHR PREMIUM PLUS® Int/Ext Hi-Gloss Enamel	No	No	Yes	Yes	Yes	Yes	Yes	114, 119	No	Yes	Yes	Yes
2-8050	BEHR PREMIUM PLUS® Int/Ext Hi-Gloss Enamel (Low VOC)	No	No	Yes	Yes	Yes	Yes	Yes	114, 119	No	Yes	Yes	Yes
8610/8620	BEHR PREMIUM PLUS® Int/Ext Hi-Gloss Enamel (Red/Black)	No	No	Yes	Yes	Yes	Yes	No	No	No	No	No	No

PRODUCT CODE	PRODUCT DESCRIPTION	SCAQMD	CARB	OTC	LADCO	AIM	LEED® 2009*	LEED® V.4*	MPI®	MPI X-GREEN	GREEN-GUARD®	CHPS	NAHB/ICC NGBS
EXTERIOR PAINT													
25/35	BEHR® Barn & Fence Paint (Flat)	No	No	Yes	Yes	Yes	No	No	16	No	No	No	No
4200	BEHR® Exterior Acrylic Textured Coating	No	Yes	Yes	Yes	Yes	Yes	No	No	No	Yes	Yes	Yes
4450	BEHR MARQUEE® Exterior Flat Enamel	Yes	Yes	Yes	Yes	Yes	Yes	Yes	10	No	Yes	Yes	Yes
9450	BEHR MARQUEE® Exterior Satin Enamel	Yes	Yes	Yes	Yes	Yes	Yes	Yes	15	No	Yes	Yes	Yes
5450	BEHR MARQUEE® Exterior Semi-Gloss Enamel	Yes	Yes	Yes	Yes	Yes	Yes	Yes	11	No	Yes	Yes	Yes
65/66	BEHR® Multi-Surface Roof Paint	Yes	Yes	Yes	Yes	Yes	No	No	No	No	No	No	No
67/68	BEHR PREMIUM® Elastomeric Masonry, Stucco & Brick Paint (Flat)	Yes	Yes	Yes	Yes	Yes	Yes	No	No	No	No	No	No
4700	BEHR PREMIUM® Exterior High Build Coating	Yes	Yes	Yes	Yes	Yes	Yes	No	No	No	No	No	No
4100	BEHR PREMIUM® Exterior Multi-Surface Flat Paint	Yes	Yes	Yes	Yes	Yes	Yes	No	10	No	No	No	Yes
4050	BEHR PREMIUM PLUS® Exterior Flat Enamel	Yes	Yes	Yes	Yes	Yes	Yes	Yes	10	No	Yes	Yes	Yes
9050	BEHR PREMIUM PLUS® Exterior Satin Enamel	Yes	Yes	Yes	Yes	Yes	Yes	Yes	15	No	Yes	Yes	Yes
5050	BEHR PREMIUM PLUS® Exterior Semi-Gloss Enamel	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	No	Yes	Yes	No
4850	BEHR PREMIUM PLUS ULTRA® Exterior Flat Enamel	Yes	Yes	Yes	Yes	Yes	Yes	Yes	10	No	Yes	Yes	Yes
9850	BEHR PREMIUM PLUS ULTRA® Exterior Satin Enamel	Yes	Yes	Yes	Yes	Yes	Yes	Yes	15	No	Yes	Yes	Yes
5850	BEHR PREMIUM PLUS ULTRA® Exterior Semi-Gloss Enamel	Yes	Yes	Yes	Yes	Yes	Yes	Yes	11	No	Yes	Yes	Yes
PR610	BEHR PRO™ e600 Exterior Flat Paint	Yes	Yes	Yes	Yes	Yes	Yes	No	10	No	No	No	No
PR640	BEHR PRO™ e600 Exterior Satin Paint	Yes	Yes	Yes	Yes	Yes	Yes	No	15	No	No	No	No
PR670	BEHR PRO™ e600 Exterior Semi-Gloss Paint	Yes	Yes	Yes	Yes	Yes	Yes	No	No	No	No	No	No
INTERIOR/EXTERIOR COATINGS, WOOD STAINS & FINISHES													
9	BEHR® Oil-Latex Redwood Stain	Yes	Yes	Yes	Yes	Yes	Yes	No	No	No	No	No	No
5000	BEHR PREMIUM DECKOVER® Wood & Concrete Coating (Smooth)	Yes	Yes	Yes	Yes	Yes	Yes	No	127	No	No	No	No
5005	BEHR PREMIUM DECKOVER® Wood & Concrete Coating (Textured)	Yes	Yes	Yes	Yes	Yes	Yes	No	127	No	No	No	No
15	BEHR PREMIUM® Transparent Log Home Gloss Finish	Yes	Yes	Yes	Yes	Yes	Yes	No	No	No	No	No	No
4000	BEHR PREMIUM® Transparent Penetrating Oil Wood Finish	No	No	No	No	No	No	No	13, 33	No	No	No	No
500	BEHR PREMIUM® Weatherproofing All-In-One Wood Finish (Transparent)	Yes	Yes	Yes	Yes	Yes	Yes	No	No	No	No	No	No
5077	BEHR PREMIUM® Weatherproofing All-In-One Wood Stain & Sealer (Semi-Transparent)	Yes	Yes	Yes	Yes	Yes	Yes	No	156	No	No	No	No
5011	BEHR PREMIUM® Weatherproofing All-In-One Wood Stain & Sealer (Solid Color)	Yes	Yes	Yes	Yes	Yes	Yes	No	16	No	No	No	No
11	BEHR® Solid Color House & Fence Wood Stain	Yes	Yes	Yes	Yes	Yes	Yes	No	No	No	No	No	No
400	BEHR® Waterproofing Wood Finish (Transparent)	Yes	Yes	Yes	Yes	Yes	Yes	No	No	No	No	No	No
3077	BEHR® Waterproofing Wood Stain (Semi-Transparent)	Yes	Yes	Yes	Yes	Yes	Yes	No	No	No	No	No	No
211	BEHR® Waterproofing Wood Stain (Solid Color)	Yes	Yes	Yes	Yes	Yes	Yes	No	16	No	No	No	No
INTERIOR/EXTERIOR CONCRETE COATINGS													
900	BEHR PREMIUM® 1-Part Epoxy Acrylic Concrete & Garage Floor Paint (Satin)	Yes	Yes	Yes	Yes	Yes	Yes	No	No	No	No	No	No
980	BEHR PREMIUM® Concrete & Masonry Protector & Waterproofer	Yes	Yes	Yes	Yes	Yes	Yes	No	117	No	No	No	No
850	BEHR PREMIUM® Concrete Stain (Semi-Transparent)	Yes	Yes	Yes	Yes	Yes	Yes	No	58	No	No	No	No
800	BEHR PREMIUM® Concrete Stain (Solid Color)	Yes	Yes	Yes	Yes	Yes	Yes	No	No	No	No	No	No
5000	BEHR PREMIUM DECKOVER® Wood & Concrete Coating (Smooth)	Yes	Yes	Yes	Yes	Yes	Yes	No	127	No	No	No	No
5005	BEHR PREMIUM DECKOVER® Wood & Concrete Coating (Textured)	Yes	Yes	Yes	Yes	Yes	Yes	No	127	No	No	No	No
863	BEHR PREMIUM® Decorative Concrete Dye	Yes	Yes	Yes	Yes	Yes	Yes	No	No	No	No	No	No
650/655	BEHR PREMIUM® GRANITE GRIP™ Coating (Flat)	Yes	Yes	Yes	Yes	Yes	Yes	No	No	No	No	No	No
986	BEHR PREMIUM® Low-Lustre Sealer	Yes	Yes	Yes	Yes	Yes	Yes	No	No	No	No	No	No
6705	BEHR PREMIUM® Porch & Patio Floor Paint (Gloss)	No	No	No	No	Yes	Yes	No	No	No	No	No	No
6050	BEHR PREMIUM® Porch & Patio Floor Paint (Low Lustre)	Yes	Yes	Yes	Yes	Yes	Yes	No	127	No	No	No	No
985	BEHR PREMIUM® Wet-Look Sealer	Yes	Yes	Yes	Yes	Yes	Yes	No	99	No	No	No	No
CLEANERS													
63	BEHR PREMIUM® All-In-One Wood Cleaner	Yes	Yes	Yes	Yes	Yes	n/a	n/a	No	No	No	No	No
64	BEHR PREMIUM® Wood Stain & Finish Stripper	Yes	Yes	Yes	Yes	Yes	n/a	n/a	No	No	No	No	No

You need to know that the products you are using will do what they promise. A product that is low or zero VOC** may not matter to your customers, but if you are required to meet specific standards and project specifications, it will matter to you. This is why Behr submits its products to undergo rigorous independent testing by various organizations, such as the Master Painters Institute (MPI) and GREENGUARD, for when project specifications require certifications.

*See usbgc.org/LEED for details.

**< 5 g/L VOC

MPI is a registered trademark of Master Painters Institute.® GREENGUARD is a registered trademark of UL LLC. Updated as of 9/1/2016. For the latest BEHR and KILZ Product MPI certifications, visit mpi.net

Master Architectural Painting Specification

Part 1: General

1.01 | Summary

Work includes furnishing of materials and equipment, preparation of surfaces, and completion of painting and finishing of surfaces as required by drawings and specified herein.

1.02 | Related Work

- A. Factory, pre-finished items as specified in various sections
- B. Shop painting specified in respective sections
- C. Architectural woodworking
- D. Surfaces not to be painted:
 1. Pre-finished wall, ceiling and floor coverings
 2. Items with factory-applied final finish
 3. Concealed ducts, pipes and conduit
 4. Surfaces specifically scheduled or noted on Drawings not to be painted

1.03 | Submittals

- A. Product data:
 1. Not less than thirty (30) days before beginning work, submit a complete list of materials proposed for use, together with manufacturer's specifications.
 2. Paint materials and products shall be subject to Architect's approval.
- B. Color samples:
 1. Prepare color and finishes on samples, 8-1/2" x 11" in size.
 2. Submit samples as requested until required sheen, color and texture is achieved.
 3. Prepare wood samples on type and quality of wood specified for use on project.
 4. Label and identify each sample as to location and application.

1.04 | Colors

- A. Colors are to be selected or approved by Architect and actual color chips shall be supplied to Contractor for matching. All undercoats shall be tinted to approximately half the color of finish coat.
- B. Approval of final colors: Do not apply final coat of paint until colors have been approved by Architect.
- C. The number of colors to be used shall be as determined by Architect. Architect reserves the right to vary colors throughout project.

1.05 | Delivery, Storage and Handling

- A. Deliver paint materials in sealed original-labeled containers bearing manufacturer's name, type of paint, stock number, color and instructions for reducing or mixing, where applicable.
- B. Paint materials and equipment:
 1. Store only acceptable project materials on site.
 2. Store in a suitable location.
 3. Restrict storage to paint materials and related materials.
 4. Comply with health and fire regulations.

1.06 | Project Conditions

- A. Comply with manufacturer's recommendations as to environmental conditions under which coatings and coating systems can be applied. Do not apply paint or coatings when temperature is below 50° F. Do not apply exterior paint in damp or rainy weather; ensure that the surface has dried thoroughly before proceeding. Surface temperature must be at least 5° F above dew point before painting.
- B. Do not apply finish in areas where dust or contaminants are being generated.
- C. Use low-odor, low-VOC products to minimize impact on indoor environmental air quality.

Part 2: Products

2.01 | Materials

- A. Products specified are as manufactured by Behr Process Corporation, Santa Ana, California. Other manufacturers to conform to materials listed and be approved by Architect.
- B. Materials selected for coating systems for each type surface shall be the product of a single manufacturer.
- C. Accessory materials such as thinner, linseed oil, putty and shellac shall be of the highest quality and by approved manufacturer, which comply with local VOC-content-limits regulations.

- D. Paints shall be ready-mixed except field-catalyzed coatings.
- E. Do not thin finish coats without Architect's approval.
- F. Unsuitability of specified products: Claims concerning unsuitability of any material specified or inability to satisfactorily produce the work will not be entertained, unless such claim is made in writing to Architect before work is started.
- G. Number of coats scheduled is minimum. Apply additional coats at no additional cost if necessary to completely hide base materials, produce uniform color, and provide satisfactory finish result.
- H. Submitted paints and coatings shall comply with air-quality regulations and VOC content limits of authorities having jurisdiction.

Part 3: Execution

3.01 | Examination

- A. Examine surfaces scheduled to receive paint and finishes for conditions that will adversely affect execution, permanence or quality of work, and which cannot be put into acceptable condition through preparatory work as included in Article 3.02 "Preparation." Notify Architect in writing of any defects or conditions which will prevent a satisfactory installation.
- B. Do not proceed with surface preparation or coating application until conditions are suitable.
- C. Commencement of installation shall be construed as acceptance of surfaces.

3.02 | Preparation

- A. Surfaces to receive paint shall be clean, dry, smooth, and dust-free before application of coatings.

Prepare surfaces as follows:

1. **Wood:** Sand smooth and remove dust. Fill open joints, cracks, nail holes and other pits or depressions flush and smooth with putty or wood dough after priming. Use wood dough to match finish paint coat. Touch up knots or sap streaks with pigmented shellac before priming.
2. **Concrete:** Remove bond breaker and release agent residue, loose particles, efflorescence and encrustations from cured concrete substrates. Fill depressions and remove fins and projections not inherent in base material. Prime with an alkali-resistant primer.
3. **Primed Ferrous Metal:** Remove contaminants and foreign matter. Touch up abrasions with a suitable ferrous-metal primer.

- 4. **Unprimed Ferrous Metal:** Remove rust, mill scale and foreign matter by wire-brushing, scraping, abrasive blasting, or solvent as required to provide a clean, smooth surface.
 - 5. **Galvanized Metal:** Remove oils and passivators, and clean entire surface with an appropriate solvent. Pretreat with a chemical etching solution. Apply primer same day as pretreatment is applied.
 - 6. **Phosphatized Metal** shall not be chemically etched. Clean and apply a suitable metal primer.
 - 7. **Gypsum Board:** Remove dust and foreign matter. Fill pits flush and smooth with joint compound and, where required, skim coat to provide the specified level of finish before application of decoration.
 - 8. **Plaster:** Fill hairline cracks, small holes and imperfections on plaster surfaces with patching plaster. Smooth off to match adjacent surfaces. Apply an alkali-resistant primer or wash with fresh water and neutralize high alkalinity surfaces where they occur.
- B. Surfaces, which cannot be prepared or painted as specified, shall be immediately brought to the attention of Architect in writing.
 1. Starting of work without such notification will be considered acceptance by Contractor of surfaces involved.
 2. Replace unsatisfactory work caused by improper or defective surfaces as directed by Architect at no additional cost to Owner.

3.03 | Application

- A. Do not apply initial coating until moisture content of surface is within limitations recommended by paint manufacturer.
- B. Application:
 1. Apply paint with suitable brushes, rollers or spraying equipment.
 2. Apply stain in accordance with manufacturer's recommendations.
 3. Rate of application shall not exceed that as recommended by paint manufacturer for surface involved.
- C. Comply with recommendations of product manufacturer for drying time between succeeding coats.
- D. Leave parts of molding and ornaments clean and true to details with no undue amount of paint in corners and depressions.
- E. Make edges of paint adjoining other material or color clean and sharp with no overlapping.

- F. Refinish whole wall where portion of finish is not acceptable.
- G. Apply materials evenly with proper film thickness and free of runs, sags, skips and other defects. Hard, glossy finishes shall be sanded lightly between coats, dusted and cleaned before recoating.
- H. Remove hardware, hardware accessories, plates, lighting fixtures and similar items in place prior to painting, and replace upon completion of each space.
- I. Disconnect heating and other equipment adjacent to walls using workmen skilled in appropriate trades, and move to permit wall surfaces to be painted. Following completion of painting, they shall be expertly replaced and reconnected.
- J. Paint visible surfaces behind vents, registers or grilles flat black.
 1. Wash exposed metal with solvent, then prime and paint as scheduled.
 2. Spray paint wherever practical.
- K. Do not paint over Underwriters' labels, fusible links or sprinkler heads.
- L. EXPOSED PLUMBING AND MECHANICAL ITEMS: Items without factory finish such as conduits, pipes, access panels and items of similar nature shall be finished to match adjacent wall and ceiling surfaces unless otherwise directed.

3.04 | Cleanup

Upon completion of work, remove equipment, excess material and debris. Remove paint splatter and leave area in a neat and orderly condition.

3.05 | Protection

- A. Protect work of other trades, whether to be painted or not, against damage by painting. Correct damage by cleaning, repairing or replacing and repainting, as acceptable to Architect.
- B. Provide 'wet paint' signs to protect newly painted finishes. Remove temporary protective wrappings provided by others for protection of their work after completion of painting operations.
 1. At completion of construction activities of other trades, touch up and restore damaged or defaced painted surfaces.

3.06 | Finish Schedule

- A. Finish surfaces in accordance with schedule. Catalog names and numbers refer to products as manufactured or distributed by the Behr Process Corporation, Santa Ana, California, except as otherwise specified.

- B. Provide paint finishes of even, uniform color, free from cloudy or mottled appearance. Properly correct non-complying work to satisfaction of Owner's representative and representative of Behr Process Corporation.
- C. Some colors, especially accent colors, may require multiple finish coats for adequate coverage and opacity.
- D. The specified number of primer and finish coats is minimum acceptable. If full coverage and opacity is not obtained with specified number of coats, apply additional coats as necessary to produce required finish.
- E. Application Finish Schedule:

Exterior Paint Schedule

1. Stucco and Cement Plaster

Flat—Premium, 100% Acrylic

- First Coat: BEHR PREMIUM PLUS® Interior/Exterior Multi-Surface Primer & Sealer (436)
- Second Coat: BEHR PREMIUM PLUS Exterior Flat Paint (4050)
- Third Coat: BEHR PREMIUM PLUS Exterior Flat Paint (4050)

Satin—Premium, 100% Acrylic

- First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)
- Second Coat: BEHR PREMIUM PLUS Exterior Satin Enamel (9050)
- Third Coat: BEHR PREMIUM PLUS Exterior Satin Enamel (9050)

Flat—Professional, 100% Acrylic

- First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)
- Second Coat: BEHR PRO™ e600 Exterior Flat Paint (610)
- Third Coat: BEHR PRO e600 Exterior Flat Paint (610)

Satin—Professional, 100% Acrylic

- First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)
- Second Coat: BEHR PRO e600 Exterior Satin Paint (640)
- Third Coat: BEHR PRO e600 Exterior Satin Paint (640)

Semi-Gloss—Professional, 100% Acrylic

- First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)
- Second Coat: BEHR PRO e600 Exterior Semi-Gloss Paint (670)
- Third Coat: BEHR PRO e600 Exterior Semi-Gloss Paint (670)

2. Stucco and Cement Plaster

Flat—Premium High Build Coating, 100% Acrylic

- First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)
- Second Coat: BEHR PREMIUM® Exterior High Build Coating (4700)
- Third Coat: BEHR PREMIUM Exterior High Build Coating (4700)

3. Stucco, Cement Plaster, Masonry & Brick

Low Sheen—Premium Elastomeric, 100% Acrylic

- First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)
- Second Coat: BEHR PREMIUM Elastomeric Masonry, Stucco & Brick Paint (67/68)
- Third Coat: BEHR PREMIUM Elastomeric Masonry, Stucco & Brick Paint (67/68)

4. Concrete, Tilt-Up

Flat—Premium, 100% Acrylic

- First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)

- Second Coat: BEHR PREMIUM PLUS Exterior Flat Paint (4050)
- Third Coat: BEHR PREMIUM PLUS Exterior Flat Paint (4050)

Satin—Premium, 100% Acrylic

- First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)
- Second Coat: BEHR PREMIUM PLUS Exterior Satin Enamel (9050)
- Third Coat: BEHR PREMIUM PLUS Exterior Satin Enamel (9050)

Semi-Gloss—Premium, 100% Acrylic

- First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)
- Second Coat: BEHR PREMIUM PLUS Exterior Semi-Gloss Enamel (5050)
- Third Coat: BEHR PREMIUM PLUS Exterior Semi-Gloss Enamel (5050)

Flat—Professional, 100% Acrylic

- First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)
- Second Coat: BEHR PRO e600 Exterior Flat Paint (610)
- Third Coat: BEHR PRO e600 Exterior Flat Paint (610)

Satin—Professional, 100% Acrylic

- First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)
- Second Coat: BEHR PRO e600 Exterior Satin Paint (640)
- Third Coat: BEHR PRO e600 Exterior Satin Paint (640)

Semi-Gloss—Professional, 100% Acrylic	
First Coat:	BEHR PREMIUM PLUS® Interior/Exterior Multi-Surface Primer & Sealer (436)
Second Coat:	BEHR PRO™ e600 Exterior Semi-Gloss Paint (670)
Third Coat:	BEHR PRO e600 Exterior Semi-Gloss Paint (670)

5. Concrete, Tilt-Up

Flat—Premium High Build Coating, 100% Acrylic	
First Coat:	BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)
Second Coat:	BEHR PREMIUM® Exterior High Build Coating (4700)
Third Coat:	BEHR PREMIUM Exterior High Build Coating (4700)

6. Concrete Block (CMU)

Flat—Premium, 100% Acrylic	
First Coat:	BEHR PRO Block Filler Primer (50)
Second Coat:	BEHR PREMIUM PLUS Exterior Flat Paint (4050)
Third Coat:	BEHR PREMIUM PLUS Exterior Flat Paint (4050)

Satin—Premium, 100% Acrylic	
First Coat:	BEHR PRO Block Filler Primer (50)
Second Coat:	BEHR PREMIUM PLUS Exterior Satin Enamel (9050)
Third Coat:	BEHR PREMIUM PLUS Exterior Satin Enamel (9050)

Semi-Gloss—Premium, 100% Acrylic	
First Coat:	BEHR PRO Block Filler Primer (50)
Second Coat:	BEHR PREMIUM PLUS Exterior Semi-Gloss Enamel (5050)
Third Coat:	BEHR PREMIUM PLUS Exterior Semi-Gloss Enamel (5050)

Flat—Professional, 100% Acrylic	
First Coat:	BEHR PRO Block Filler Primer (50)
Second Coat:	BEHR PRO e600 Exterior Flat Paint (610)
Third Coat:	BEHR PRO e600 Exterior Flat Paint (610)

Satin—Professional, 100% Acrylic	
First Coat:	BEHR PRO Block Filler Primer (50)
Second Coat:	BEHR PRO e600 Exterior Satin Paint (640)
Third Coat:	BEHR PRO e600 Exterior Satin Paint (640)

Semi-Gloss—Professional, 100% Acrylic	
First Coat:	BEHR PRO Block Filler Primer (50)
Second Coat:	BEHR PRO e600 Exterior Semi-Gloss Paint (670)
Third Coat:	BEHR PRO e600 Exterior Semi-Gloss Paint (670)

7. Concrete Block (CMU)

Flat—Premium High Build Coating, 100% Acrylic	
First Coat:	BEHR PRO Block Filler Primer (50)
Second Coat:	BEHR PREMIUM Exterior High Build Coating (4700)
Third Coat:	BEHR PREMIUM Exterior High Build Coating (4700)

8. Concrete Block (CMU)

Low Sheen—Premium Elastomeric, 100% Acrylic	
First Coat:	BEHR PRO Block Filler Primer (50)
Second Coat:	BEHR PREMIUM Elastomeric Masonry, Stucco & Brick Paint (67/68)
Third Coat:	BEHR PREMIUM Elastomeric Masonry, Stucco & Brick Paint (67/68)

9. Concrete—Porches and Patios

Low-Lustre—Premium, 100% Acrylic	
First Coat:	BEHR PREMIUM Concrete & Masonry Bonding Primer (880)
Second Coat:	BEHR PREMIUM Porch & Patio Floor Paint (6050)
Third Coat:	BEHR PREMIUM Porch & Patio Floor Paint (6050)

10. Concrete—Horizontal Surfaces

Eggshell (Satin)—Premium High-Performance Epoxy/Acrylic	
Two Coats:	BEHR PREMIUM 1-Part Epoxy Acrylic Concrete & Garage Floor Paint (900)

11. Concrete—Porches and Patios

Gloss—Premium, 100% Acrylic	
First Coat:	BEHR PREMIUM Concrete & Masonry Bonding Primer (880)
Second Coat:	BEHR PREMIUM Porch & Patio Floor Paint (6705)
Third Coat:	BEHR PREMIUM Porch & Patio Floor Paint (6705)

12. Concrete—Solid Color Coating: Decks, Walkways, Pool Decks, Sidewalks

Flat—Premium, 100% Acrylic	
Two Coats:	BEHR PREMIUM DECKOVER® Wood & Concrete Coating (5000)
Textured—Premium, 100% Acrylic	
Two Coats:	BEHR PREMIUM DECKOVER Textured Wood & Concrete Coating (5005)

13. Concrete—Solid Color Stain

Flat—Premium, Siliconized, 100% Acrylic	
Two Coats:	BEHR PREMIUM Solid Color Concrete Stain (800/830)

14. Concrete—Semi-Transparent Stain

Flat—Premium, Siliconized, 100% Styrene Acrylic	
Two Coats:	BEHR PREMIUM Semi-Transparent Concrete Stain (850)

15. Concrete, Sealer: Wet Look (Vertical or Horizontal Substrates)

High-Gloss—Premium, Acrylic	
Two Coats:	BEHR PREMIUM Wet-Look Sealer (985)

16. Concrete, Sealer: Wet Look (Vertical or Horizontal Substrates)

Low-Lustre—Premium, Acrylic	
Two Coats:	BEHR PREMIUM Low-Lustre Sealer (986)

17. Wood—Paint Finish

Flat—Premium, 100% Acrylic	
First Coat:	BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)
Second Coat:	BEHR PREMIUM PLUS Exterior Flat Paint (4050)
Third Coat:	BEHR PREMIUM PLUS Exterior Flat Paint (4050)

Satin—Premium, 100% Acrylic	
First Coat:	BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)
Second Coat:	BEHR PREMIUM PLUS Exterior Satin Enamel (9050)
Third Coat:	BEHR PREMIUM PLUS Exterior Satin Enamel (9050)

Semi-Gloss—Premium, 100% Acrylic	
First Coat:	BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)
Second Coat:	BEHR PREMIUM PLUS Exterior Semi-Gloss Enamel (5050)
Third Coat:	BEHR PREMIUM PLUS Exterior Semi-Gloss Enamel (5050)

High-Gloss—Premium, 100% Acrylic

First Coat: BEHR PREMIUM PLUS® Interior/Exterior Multi-Surface Primer & Sealer (436)

Second Coat: BEHR PREMIUM PLUS Interior/Exterior Hi-Gloss Enamel (8050)

Third Coat: BEHR PREMIUM PLUS Interior/Exterior Hi-Gloss Enamel (8050)

(Note: Premium Plus 2-8050 Enamel conforms to VOC content limits of South Coast AQMD Rule 1113.)

Flat—Professional, 100% Acrylic

First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)

Second Coat: BEHR PRO™ e600 Exterior Flat Paint (610)

Third Coat: BEHR PRO e600 Exterior Flat Paint (610)

Satin—Professional, 100% Acrylic

First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)

Second Coat: BEHR PRO e600 Exterior Satin Paint (640)

Third Coat: BEHR PRO e600 Exterior Satin Paint (640)

Semi-Gloss—Professional, 100% Acrylic

First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)

Second Coat: BEHR PRO e600 Exterior Semi-Gloss Paint (670)

Third Coat: BEHR PRO e600 Exterior Semi-Gloss Paint (670)

18. Wood—Paint Finish, Alkyd, Low VOC, Water-Reducible Enamel

Semi-Gloss—Alkyd

First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)

Second Coat: BEHR® Alkyd Semi-Gloss Enamel (3900)

Third Coat: BEHR Alkyd Semi-Gloss Enamel (3900)

19. Wood—Stain Finish—Water-Based Semi-Transparent

Flat—Premium, 100% Acrylic

Two Coats: BEHR PREMIUM® Semi-Transparent Weatherproofing All-In-One Wood Stain & Sealer (5077 Tint Base; 5330 Redwood; 5533 Cedar Naturaltone)

20. Wood—Stain Finish—Solid Color

Flat—Premium, 100% Acrylic

Two Coats: BEHR PREMIUM Solid Color Weatherproofing All-In-One Wood Stain & Sealer (5011 White; 5013 Deep Base; 50533 Cedar Naturaltone)

21. Wood—Decks, Patios, Railings, Boat Docks and Composite Decks

Flat—Premium, 100% Acrylic

Two Coats: BEHR PREMIUM DECKOVER® Wood & Concrete Coating (5000)

Textured—Premium, 100% Acrylic

Two Coats: BEHR PREMIUM DECKOVER Textured Wood & Concrete Coating (5005)

22. Wood—Porches and Patios

Low-Lustre—Premium, 100% Acrylic

First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)

Second Coat: BEHR PREMIUM Porch & Patio Floor Paint (6050)

Third Coat: BEHR PREMIUM Porch & Patio Floor Paint (6050)

23. Wood—Porches and Patios

Gloss—Premium, 100% Acrylic

First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)

Second Coat: BEHR PREMIUM Porch & Patio Floor Paint (6705)

Third Coat: BEHR PREMIUM Porch & Patio Floor Paint (6705)

24. Ferrous Metal

Flat—Premium, 100% Acrylic

First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)

Second Coat: BEHR PREMIUM PLUS Exterior Flat Paint (4050)

Third Coat: BEHR PREMIUM PLUS Exterior Flat Paint (4050)

Satin—Premium, 100% Acrylic

First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)

Second Coat: BEHR PREMIUM PLUS Exterior Satin Enamel (9050)

Third Coat: BEHR PREMIUM PLUS Exterior Satin Enamel (9050)

Semi-Gloss—Premium, 100% Acrylic

First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)

Second Coat: BEHR PREMIUM PLUS Exterior Semi-Gloss Enamel (5050)

Third Coat: BEHR PREMIUM PLUS Exterior Semi-Gloss Enamel (5050)

High-Gloss—Premium, 100% Acrylic

First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)

Second Coat: BEHR PREMIUM PLUS Interior/Exterior Hi-Gloss Enamel (8050)

Third Coat: BEHR PREMIUM PLUS Interior/Exterior Hi-Gloss Enamel (8050)

(Note: Premium Plus 2-8050 Enamel conforms to VOC content limits of South Coast AQMD Rule 1113.)

Flat—Professional, 100% Acrylic

First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)

Second Coat: BEHR PRO e600 Exterior Flat Paint (610)

Third Coat: BEHR PRO e600 Exterior Flat Paint (610)

Satin—Professional, 100% Acrylic

First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)

Second Coat: BEHR PRO e600 Exterior Satin Paint (640)

Third Coat: BEHR PRO e600 Exterior Satin Paint (640)

Semi-Gloss—Professional, 100% Acrylic

First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)

Second Coat: BEHR PRO e600 Exterior Semi-Gloss Paint (670)

Third Coat: BEHR PRO e600 Exterior Semi-Gloss Paint (670)

25. Ferrous Metal—Alkyd, Low VOC, Water-Reducible Enamel

Semi-Gloss—Alkyd

First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)

Second Coat: BEHR Alkyd Semi-Gloss Enamel (3900)

Third Coat: BEHR Alkyd Semi-Gloss Enamel (3900)

26. Ferrous Metal—High Performance Direct-To-Metal Coating, Industrial Maintenance

Semi-Gloss—Light Industrial, Premium, 100% Acrylic

- First Coat: BEHR PREMIUM PLUS® Interior/Exterior Multi-Surface Primer & Sealer (436)
- Second Coat: BEHR PREMIUM® Interior/Exterior Direct-To-Metal Semi-Gloss Paint (3200)
- Third Coat: BEHR PREMIUM Interior/Exterior Direct-To-Metal Semi-Gloss Paint (3200)

Gloss—Light Industrial, Premium, 100% Acrylic

- First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)
- Second Coat: BEHR PREMIUM Interior/Exterior Direct-To-Metal Gloss Paint (8200)
- Third Coat: BEHR PREMIUM Interior/Exterior Direct-To-Metal Gloss Paint (8200)

27. Galvanized Metal

Flat—Premium, 100% Acrylic

- Pretreatment: Krud Kutter® Metal Clean & Etch (KRK-19)
- First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)
- Second Coat: BEHR PREMIUM PLUS Exterior Flat Paint (4050)
- Third Coat: BEHR PREMIUM PLUS Exterior Flat Paint (4050)

Satin—Premium, 100% Acrylic

- Pretreatment: Krud Kutter Metal Clean & Etch (KRK-19)
- First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)
- Second Coat: BEHR PREMIUM PLUS Exterior Satin Enamel (9050)
- Third Coat: BEHR PREMIUM PLUS Exterior Satin Enamel (9050)

Semi-Gloss—Premium, 100% Acrylic

- Pretreatment: Krud Kutter Metal Clean & Etch (KRK-19)
- First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)
- Second Coat: BEHR PREMIUM PLUS Exterior Semi-Gloss Enamel (5050)
- Third Coat: BEHR PREMIUM PLUS Exterior Semi-Gloss Enamel (5050)

High-Gloss—Premium, 100% Acrylic

- Pretreatment: Krud Kutter Metal Clean & Etch (KRK-19)
- First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)
- Second Coat: BEHR PREMIUM PLUS Interior/Exterior Hi-Gloss Enamel (8050)
- Third Coat: BEHR PREMIUM PLUS Interior/Exterior Hi-Gloss Enamel (8050)

(Note: Premium Plus 2-8050 Enamel conforms to VOC content limits of South Coast AQMD Rule 1113.)

Flat—Professional, 100% Acrylic

- Pretreatment: Krud Kutter Metal Clean & Etch (KRK-19)
- First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)
- Second Coat: BEHR PRO™ e600 Exterior Flat Paint (610)
- Third Coat: BEHR PRO e600 Exterior Flat Paint (610)

Satin—Professional, 100% Acrylic

- Pretreatment: Krud Kutter Metal Clean & Etch (KRK-19)
- First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)
- Second Coat: BEHR PRO™ e600 Exterior Satin Paint (640)
- Third Coat: BEHR PRO e600 Exterior Satin Paint (640)

Trademarks are the property of their respective owners.

Interior Paint Schedule

1. Gypsum Board

Flat—Premium, 100% Acrylic—Low Odor/VOC

- First Coat: BEHR PREMIUM PLUS Interior Drywall Primer & Sealer (73)
- Second Coat: BEHR PREMIUM PLUS Interior Flat Paint (1050)
- Third Coat: BEHR PREMIUM PLUS Interior Flat Paint (1050)

Eggshell—Premium, 100% Acrylic—Low Odor/VOC

- First Coat: BEHR PREMIUM PLUS Interior Drywall Primer & Sealer (73)
- Second Coat: BEHR PREMIUM PLUS Interior Eggshell Enamel (2050)
- Third Coat: BEHR PREMIUM PLUS Interior Eggshell Enamel (2050)

Satin—Premium, 100% Acrylic—Low Odor/VOC

- First Coat: BEHR PREMIUM PLUS Interior Drywall Primer & Sealer (73)
- Second Coat: BEHR PREMIUM PLUS Interior Satin Enamel (7050)
- Third Coat: BEHR PREMIUM PLUS Interior Satin Enamel (7050)

Semi-Gloss—Premium, 100% Acrylic—Low Odor/VOC

- First Coat: BEHR PREMIUM PLUS Interior Drywall Primer & Sealer (73)
- Second Coat: BEHR PREMIUM PLUS Interior Semi-Gloss Enamel (3050)
- Third Coat: BEHR PREMIUM PLUS Interior Semi-Gloss Enamel (3050)

Semi-Gloss—Professional, 100% Acrylic

- Pretreatment: Krud Kutter Metal Clean & Etch (KRK-19)
- First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)
- Second Coat: BEHR PRO e600 Exterior Semi-Gloss Paint (670)
- Third Coat: BEHR PRO e600 Exterior Semi-Gloss Paint (670)

28. Galvanized Metal—Alkyd, Low VOC, Water-Reducible Enamel

Semi-Gloss—Alkyd

- Pretreatment: Krud Kutter Metal Clean & Etch (KRK-19)
- First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)
- Second Coat: BEHR® Alkyd Semi-Gloss Enamel (3900)
- Third Coat: BEHR Alkyd Semi-Gloss Enamel (3900)

29. Galvanized Metal—High Performance, Industrial Maintenance

Semi-Gloss—Light Industrial, Premium, 100% Acrylic

- Pretreatment: Krud Kutter Metal Clean & Etch (KRK-19)
- First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)
- Second Coat: BEHR PREMIUM Interior/Exterior Direct-To-Metal Semi-Gloss Paint (3200)
- Third Coat: BEHR PREMIUM Interior/Exterior Direct-To-Metal Semi-Gloss Paint (3200)

High-Gloss—Premium, 100% Acrylic—Low Odor/VOC

- First Coat: BEHR PREMIUM PLUS® Interior Drywall Primer & Sealer (73)
- Second Coat: BEHR PREMIUM PLUS Interior/Exterior Hi-Gloss Enamel (8050)
- Third Coat: BEHR PREMIUM PLUS Interior/Exterior Hi-Gloss Enamel (8050)

(Note: Premium Plus 2-8050 Enamel conforms to VOC content limits of South Coast AQMD Rule 1113.)

Flat—Professional, Latex—Low Odor/VOC

- First Coat: BEHR PREMIUM PLUS Interior Drywall Primer & Sealer (73)
- Second Coat: BEHR PRO™ i300 Interior Dead Flat Paint (310)
- Third Coat: BEHR PRO i300 Interior Dead Flat Paint (310)

Eggshell—Professional, Latex—Low Odor/VOC

- First Coat: BEHR PREMIUM PLUS Interior Drywall Primer & Sealer (73)
- Second Coat: BEHR PRO i300 Interior Eggshell Paint (330)
- Third Coat: BEHR PRO i300 Interior Eggshell Paint (330)

Semi-Gloss—Professional, Latex—Low Odor/VOC

- First Coat: BEHR PREMIUM PLUS Interior Drywall Primer & Sealer (73)
- Second Coat: BEHR PRO i300 Interior Semi-Gloss Paint (370)
- Third Coat: BEHR PRO i300 Interior Semi-Gloss Paint (370)

2. Gypsum Board

Semi-Gloss—Alkyd, Low VOC, Water-Reducible Enamel

- First Coat: BEHR PREMIUM PLUS Interior Drywall Primer & Sealer (73)
- Second Coat: BEHR® Alkyd Semi-Gloss Enamel (3900)
- Third Coat: BEHR Alkyd Semi-Gloss Enamel (3900)

3. Gypsum Board—Ceilings

Flat—Premium, 100% Acrylic—Low VOC

- First Coat: BEHR PREMIUM PLUS Interior Drywall Primer & Sealer (73)
- Second Coat: BEHR PREMIUM PLUS ULTRA® Stain-Blocking Ceiling Paint (5558)
- Third Coat: BEHR PREMIUM PLUS ULTRA Stain-Blocking Ceiling Paint (5558)

4. Gypsum Board—Dryfall Coating (Spray Applied)

Flat—Professional, 100% Acrylic—Low VOC

- First Coat: BEHR PREMIUM PLUS Interior Drywall Primer & Sealer (73)
- Second Coat: BEHR PRO Dryfall Paint White (890) Black (891)
- Third Coat: BEHR PRO Dryfall Paint White (890) Black (891)

5. Concrete, Plaster and Masonry

Flat—Premium, 100% Acrylic—Low Odor/VOC

- First Coat: BEHR PREMIUM PLUS Interior All-In-One Primer & Sealer (75)
- Second Coat: BEHR PREMIUM PLUS Interior Flat Paint (1050)
- Third Coat: BEHR PREMIUM PLUS Interior Flat Paint (1050)

Eggshell—Premium, 100% Acrylic—Low Odor/VOC

- First Coat: BEHR PREMIUM PLUS Interior All-In-One Primer & Sealer (75)
- Second Coat: BEHR PREMIUM PLUS Interior Eggshell Enamel (2050)
- Third Coat: BEHR PREMIUM PLUS Interior Eggshell Enamel (2050)

Satin—Premium, 100% Acrylic—Low Odor/VOC

- First Coat: BEHR PREMIUM PLUS Interior All-In-One Primer Sealer (75)
- Second Coat: BEHR PREMIUM PLUS Interior Satin Enamel (7050)
- Third Coat: BEHR PREMIUM PLUS Interior Satin Enamel (7050)

Semi-Gloss—Premium, 100% Acrylic—Low Odor/VOC

- First Coat: BEHR PREMIUM PLUS Interior All-In-One Primer & Sealer (75)
- Second Coat: BEHR PREMIUM PLUS Interior Semi-Gloss Enamel (3050)
- Third Coat: BEHR PREMIUM PLUS Interior Semi-Gloss Enamel (3050)

High-Gloss—Premium, 100% Acrylic—Low Odor/VOC

- First Coat: BEHR PREMIUM PLUS Interior All-In-One Primer & Sealer (75)
- Second Coat: BEHR PREMIUM PLUS Interior/Exterior Hi-Gloss Enamel (8050)
- Third Coat: BEHR PREMIUM PLUS Interior/Exterior Hi-Gloss Enamel (8050)

(Note: Premium Plus 2-8050 Enamel conforms to VOC content limits of South Coast AQMD Rule 1113.)

Flat—Professional, Latex—Low Odor/VOC

- First Coat: BEHR PREMIUM PLUS Interior All-In-One Primer & Sealer (75)
- Second Coat: BEHR PRO i300 Interior Dead Flat Paint (310)
- Third Coat: BEHR PRO i300 Interior Dead Flat Paint (310)

Eggshell—Professional, Latex—Low Odor/VOC

- First Coat: BEHR PREMIUM PLUS Interior All-In-One Primer & Sealer (75)
- Second Coat: BEHR PRO i300 Interior Eggshell Paint (330)
- Third Coat: BEHR PRO i300 Interior Eggshell Paint (330)

Semi-Gloss—Professional, Latex—Low Odor/VOC

- First Coat: BEHR PREMIUM PLUS Interior All-In-One Primer & Sealer (75)
- Second Coat: BEHR PRO i300 Interior Semi-Gloss Paint (370)
- Third Coat: BEHR PRO i300 Interior Semi-Gloss Paint (370)

6. Concrete—Porches and Patios

Low-Lustre—Premium, 100% Acrylic

- First Coat: BEHR PREMIUM® Concrete & Masonry Bonding Primer (880)
- Second Coat: BEHR PREMIUM Porch & Patio Floor Paint (6050)
- Third Coat: BEHR PREMIUM Porch & Patio Floor Paint (6050)

7. Concrete—Porches and Patios

Gloss—Premium, 100% Acrylic

- First Coat: BEHR PREMIUM Concrete & Masonry Bonding Primer (880)
- Second Coat: BEHR PREMIUM Porch & Patio Floor Paint (6705)
- Third Coat: BEHR PREMIUM Porch & Patio Floor Paint (6705)

8. Concrete Block (CMU)

Flat—Premium, 100% Acrylic—Low Odor/VOC

- First Coat: BEHR PRO Block Filler Primer (50)
- Second Coat: BEHR PREMIUM PLUS Interior Flat Paint (1050)
- Third Coat: BEHR PREMIUM PLUS Interior Flat Paint (1050)

Eggshell—Premium, 100% Acrylic—Low Odor/VOC

- First Coat: BEHR PRO Block Filler Primer (50)
- Second Coat: BEHR PREMIUM PLUS Interior Eggshell Enamel (2050)
- Third Coat: BEHR PREMIUM PLUS Interior Eggshell Enamel (2050)

Satin—Premium, 100% Acrylic—Low Odor/VOC

First Coat: BEHR PRO™ Block Filler Primer (50)

Second Coat: BEHR PREMIUM PLUS® Interior Satin Enamel (7050)

Third Coat: BEHR PREMIUM PLUS Interior Satin Enamel (7050)

Semi-Gloss—Premium, 100% Acrylic—Low Odor/VOC

First Coat: BEHR PRO Block Filler Primer (50)

Second Coat: BEHR PREMIUM PLUS Interior Semi-Gloss Enamel (3050)

Third Coat: BEHR PREMIUM PLUS Interior Semi-Gloss Enamel (3050)

Flat—Professional, Latex—Low Odor/VOC

First Coat: BEHR PRO Block Filler Primer (50)

Second Coat: BEHR PRO i300 Interior Dead Flat Paint (310)

Third Coat: BEHR PRO i300 Interior Dead Flat Paint (310)

Eggshell—Professional, Latex—Low Odor/VOC

First Coat: BEHR PRO Block Filler Primer (50)

Second Coat: BEHR PRO i300 Interior Eggshell Paint (330)

Third Coat: BEHR PRO i300 Interior Eggshell Paint (330)

Semi-Gloss—Professional, Latex—Low Odor/VOC

First Coat: BEHR PRO Block Filler Primer (50)

Second Coat: BEHR PRO i300 Interior Semi-Gloss Paint (370)

Third Coat: BEHR PRO i300 Interior Semi-Gloss Paint (370)

9. Ferrous Metal

Flat—Premium, 100% Acrylic—Low Odor/VOC

First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)

Second Coat: BEHR PREMIUM PLUS Interior Flat Paint (1050)

Third Coat: BEHR PREMIUM PLUS Interior Flat Paint (1050)

Eggshell—Premium, 100% Acrylic—Low Odor/VOC

First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)

Second Coat: BEHR PREMIUM PLUS Interior Eggshell Enamel (2050)

Third Coat: BEHR PREMIUM PLUS Interior Eggshell Enamel (2050)

Satin—Premium, 100% Acrylic—Low Odor/VOC

First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)

Second Coat: BEHR PREMIUM PLUS Interior Satin Enamel (7050)

Third Coat: BEHR PREMIUM PLUS Interior Satin Enamel (7050)

Semi-Gloss—Premium, 100% Acrylic—Low Odor/VOC

First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)

Second Coat: BEHR PREMIUM PLUS Interior Semi-Gloss Enamel (3050)

Third Coat: BEHR PREMIUM PLUS Interior Semi-Gloss Enamel (3050)

High-Gloss—Premium, 100% Acrylic—Low Odor/VOC

First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)

Second Coat: BEHR PREMIUM PLUS Interior/Exterior Hi-Gloss Enamel (8050)

Third Coat: BEHR PREMIUM PLUS Interior/Exterior Hi-Gloss Enamel (8050)

(Note: Premium Plus 2-8050 Enamel conforms to VOC content limits of South Coast AQMD Rule 1113.)

Trademarks are the property of their respective owners.

Flat—Professional, Latex—Low Odor/VOC

First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)

Second Coat: BEHR PRO i300 Interior Dead Flat Paint (310)

Third Coat: BEHR PRO i300 Interior Dead Flat Paint (310)

Eggshell—Professional, Latex—Low Odor/VOC

First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)

Second Coat: BEHR PRO i300 Interior Eggshell Paint (330)

Third Coat: BEHR PRO i300 Interior Eggshell Paint (330)

Semi-Gloss—Professional, Latex—Low Odor/VOC

First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)

Second Coat: BEHR PRO i300 Interior Semi-Gloss Paint (370)

Third Coat: BEHR PRO i300 Interior Semi-Gloss Paint (370)

10. Ferrous Metal

Semi-Gloss—Alkyd, Low VOC, Water-Reducible Enamel

First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)

Second Coat: BEHR® Alkyd Semi-Gloss Enamel (3900)

Third Coat: BEHR Alkyd Semi-Gloss Enamel (3900)

11. Ferrous Metal—High Performance Direct-To-Metal Coating, Industrial Maintenance

Semi-Gloss—Light Industrial, Premium, 100% Acrylic

First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)

Second Coat: BEHR PREMIUM® Interior/Exterior Direct-To-Metal Semi-Gloss Paint (3200)

Third Coat: BEHR PREMIUM Interior/Exterior Direct-To-Metal Semi-Gloss Paint (3200)

Gloss—Light Industrial, Premium, 100% Acrylic

First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)

Second Coat: BEHR PREMIUM Interior/Exterior Direct-To-Metal Gloss Paint (8200)

Third Coat: BEHR PREMIUM Interior/Exterior Direct-To-Metal Gloss Paint (8200)

12. Galvanized Metal

Flat—Premium, 100% Acrylic—Low Odor/VOC

Pretreatment: Krud Kutter® Metal Clean & Etch (KRK-19)

First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)

Second Coat: BEHR PREMIUM PLUS Interior Flat Paint (1050)

Third Coat: BEHR PREMIUM PLUS Interior Flat Paint (1050)

Eggshell—Premium, 100% Acrylic—Low Odor/VOC

Pretreatment: Krud Kutter Metal Clean & Etch (KRK-19)

First Coat: BEHR PREMIUM PLUS Interior/Exterior Multi-Surface Primer & Sealer (436)

Second Coat: BEHR PREMIUM PLUS Interior Eggshell Enamel (2050)

Third Coat: BEHR PREMIUM PLUS Interior Eggshell Enamel (2050)

Satin—Premium, 100% Acrylic—Low Odor/VOC

Pretreatment: Krud Kutter®
Metal Clean & Etch (KRK-19)

First Coat: BEHR PREMIUM PLUS®
Interior/Exterior Multi-Surface
Primer & Sealer (436)

Second Coat: BEHR PREMIUM PLUS
Interior Satin Enamel (7050)

Third Coat: BEHR PREMIUM PLUS
Interior Satin Enamel (7050)

Semi-Gloss—Premium, 100% Acrylic—Low Odor/VOC

Pretreatment: Krud Kutter
Metal Clean & Etch (KRK-19)

First Coat: BEHR PREMIUM PLUS
Interior/Exterior Multi-Surface
Primer & Sealer (436)

Second Coat: BEHR PREMIUM PLUS
Interior Semi-Gloss Enamel (3050)

Third Coat: BEHR PREMIUM PLUS
Interior Semi-Gloss Enamel (3050)

High-Gloss—Premium, 100% Acrylic—Low Odor/VOC

Pretreatment: Krud Kutter
Metal Clean & Etch (KRK-19)

First Coat: BEHR PREMIUM PLUS
Interior/Exterior Multi-Surface
Primer & Sealer (436)

Second Coat: BEHR PREMIUM PLUS
Interior/Exterior Hi-Gloss
Enamel (8050)

Third Coat: BEHR PREMIUM PLUS
Interior/Exterior Hi-Gloss
Enamel (8050)

(Note: Premium Plus 2-8050 Enamel conforms to
VOC content limits of South Coast AQMD Rule 1113.)

Flat—Professional, Latex—Low Odor/VOC

Pretreatment: Krud Kutter
Metal Clean & Etch (KRK-19)

First Coat: BEHR PREMIUM PLUS
Interior/Exterior Multi-Surface
Primer & Sealer (436)

Second Coat: BEHR PRO™ i300
Interior Dead Flat Paint (310)

Third Coat: BEHR PRO i300
Interior Dead Flat Paint (310)

Eggshell—Professional, Latex—Low Odor/VOC

Pretreatment: Krud Kutter
Metal Clean & Etch (KRK-19)

First Coat: BEHR PREMIUM PLUS
Interior/Exterior Multi-Surface
Primer & Sealer (436)

Second Coat: BEHR PRO i300
Interior Eggshell Paint (330)

Third Coat: BEHR PRO i300
Interior Eggshell Paint (330)

Semi-Gloss—Professional, Latex—Low Odor/VOC

Pretreatment: Krud Kutter
Metal Clean & Etch (KRK-19)

First Coat: BEHR PREMIUM PLUS
Interior/Exterior Multi-Surface
Primer & Sealer (436)

Second Coat: BEHR PRO i300
Interior Semi-Gloss Paint (370)

Third Coat: BEHR PRO i300
Interior Semi-Gloss Paint (370)

13. Galvanized Metal

Semi-Gloss—Alkyd, Low VOC,
Water-Reducible Enamel

Pretreatment: Krud Kutter
Metal Clean & Etch (KRK-19)

First Coat: BEHR PREMIUM PLUS
Interior/Exterior Multi-Surface
Primer & Sealer (436)

Second Coat: BEHR® Alkyd Semi-Gloss
Enamel (3900)

Third Coat: BEHR Alkyd Semi-Gloss
Enamel (3900)

**14. Galvanized Metal—High Performance
Direct-To-Metal Coating, Industrial Maintenance**

Semi-Gloss—Light Industrial, Premium, 100% Acrylic

Pretreatment: Krud Kutter
Metal Clean & Etch (KRK-19)

First Coat: BEHR PREMIUM PLUS
Interior/Exterior Multi-Surface
Primer & Sealer (436)

Second Coat: BEHR PREMIUM®
Interior/Exterior Direct-To-Metal
Semi-Gloss Paint (3200)

Third Coat: BEHR PREMIUM
Interior/Exterior Direct-To-Metal
Semi-Gloss Paint (3200)

Gloss—Light Industrial, Premium, 100% Acrylic

Pretreatment: Krud Kutter
Metal Clean & Etch (KRK-19)

First Coat: BEHR PREMIUM PLUS
Interior/Exterior Multi-Surface
Primer & Sealer (436)

Second Coat: BEHR PREMIUM Interior/Exterior
Direct-To-Metal Gloss Paint (8200)

Third Coat: BEHR PREMIUM Interior/Exterior
Direct-To-Metal Gloss Paint (8200)

**15. Ferrous and Non-Ferrous Metals—Dry Fall
Coating (Spray Applied)**

Flat—Professional, Acrylic/PVA

First Coat: BEHR PREMIUM PLUS
Interior/Exterior Multi-Surface
Primer & Sealer (436)

Second Coat: BEHR PRO Dryfall Paint
White (890) Black (891)

Third Coat: BEHR PRO Dryfall Paint
White (890) Black (891)

16. Wood—Paint Finish

Flat—Premium, 100% Acrylic—Low Odor/VOC

First Coat: BEHR PREMIUM PLUS
Interior All-In-One
Primer & Sealer (75)

Second Coat: BEHR PREMIUM PLUS
Interior Flat Paint (1050)

Third Coat: BEHR PREMIUM PLUS
Interior Flat Paint (1050)

Eggshell—Premium, 100% Acrylic—Low Odor/VOC

First Coat: BEHR PREMIUM PLUS
Interior All-In-One
Primer & Sealer (75)

Second Coat: BEHR PREMIUM PLUS
Interior Eggshell Enamel (2050)

Third Coat: BEHR PREMIUM PLUS
Interior Eggshell Enamel (2050)

Satin—Premium, 100% Acrylic—Low Odor/VOC

First Coat: BEHR PREMIUM PLUS
Interior All-In-One
Primer & Sealer (75)

Second Coat: BEHR PREMIUM PLUS
Interior Satin Enamel (7050)

Third Coat: BEHR PREMIUM PLUS
Interior Satin Enamel (7050)

Semi-Gloss—Premium, 100% Acrylic—Low Odor/VOC

First Coat: BEHR PREMIUM PLUS
Interior All-In-One
Primer & Sealer (75)

Second Coat: BEHR PREMIUM PLUS
Interior Semi-Gloss Enamel (3050)

Third Coat: BEHR PREMIUM PLUS
Interior Semi-Gloss Enamel (3050)

High-Gloss—Premium, 100% Acrylic—Low Odor/VOC

First Coat: BEHR PREMIUM PLUS
Interior All-In-One
Primer & Sealer (75)

Second Coat: BEHR PREMIUM PLUS
Interior/Exterior Hi-Gloss
Enamel (8050)

Third Coat: BEHR PREMIUM PLUS
Interior/Exterior Hi-Gloss
Enamel (8050)

(Note: Premium Plus 2-8050 Enamel conforms to
VOC content limits of South Coast AQMD Rule 1113.)

Flat—Professional, Latex—Low Odor/VOC

First Coat: BEHR PREMIUM PLUS®
Interior All-In-One
Primer & Sealer (75)

Second Coat: BEHR PRO™ i300
Interior Dead Flat Paint (310)

Third Coat: BEHR PRO i300
Interior Dead Flat Paint (310)

Trademarks are the property of their respective owners.

Eggshell—Professional—Latex, Low Odor/VOC

First Coat: BEHR PREMIUM PLUS Interior All-In-One Primer & Sealer (75)

Second Coat: BEHR PRO i300 Interior Eggshell Paint (330)

Third Coat: BEHR PRO i300 Interior Eggshell Paint (330)

Semi-Gloss—Professional—Latex, Low Odor/VOC

First Coat: BEHR PREMIUM PLUS Interior All-In-One Primer & Sealer (75)

Second Coat: BEHR PRO i300 Interior Semi-Gloss Paint (370)

Third Coat: BEHR PRO i300 Interior Semi-Gloss Paint (370)

17. Wood—Paint Finish, Alkyd, Low VOC, Water-Reducible Enamel

Semi-Gloss—Alkyd

First Coat: BEHR PREMIUM PLUS Interior All-In-One Primer & Sealer (75)

Second Coat: BEHR® Alkyd Semi-Gloss Enamel (3900)

Third Coat: BEHR Alkyd Semi-Gloss Enamel (3900)

18. Wood—Dry Fall Coating (Spray applied)

Flat—Professional, Acrylic/PVA

First Coat: BEHR PREMIUM PLUS Interior All-In-One Primer & Sealer (75)

Second Coat: BEHR PRO Dryfall Paint White (890) Black (891)

Third Coat: BEHR PRO Dryfall Paint White (890) Black (891)



BEHR **PRO**™ PAINT

A complete line of paint formulated for professional needs.

BEHR® Quality.
Professional Performance.

To learn more, contact a Behr Pro Rep: behrpro.com/relocator

